

Aurora

porcelain stoneware




COBSA USA
NEW YORK | NEW JERSEY | MIAMI

DARK





ELEAUDK1224

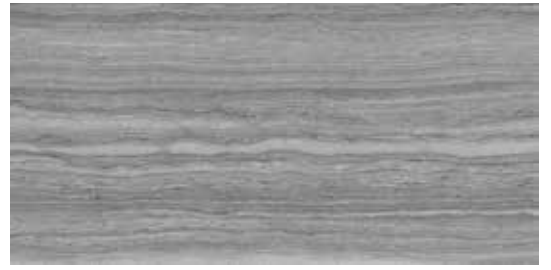

| 12x24 |

ELEAUDK2448



| 24x48 |

ELEAUDKBN324



| 3x24 bullnose |

ELEAUDKMOS22



| 2x2 mosaic |

GREY





ELEAUGR1224



| 12x24 |

ELEAUGR2448




| 24x48 |

ELEAUGRBN324



| 3x24 bullnose |

ELEAUGRMOS22



| 2x2 mosaic |

TAUPE





ELEAUTA1224



| 12x24 |

ELEAUTA2448



| 24x48 |

ELEAUTABN324



| 3x24 bullnose |

ELEAUTAMOS22



| 2x2 mosaic |

WHITE





ELEAUWH1224



| 12x24 |

ELEAUWH2448



| 24x48 |

ELEAUWHBN324



| 3x24 bullnose |

ELEAUWHMOS22



| 2x2 mosaic |

Suggested Applications

Floor Wall Residential Light Commercial Heavy Commercial Exterior Pools

*Wear can vary greatly. please consult with a professional.

Installation Suggestions

Plank Installation* Modular Setting Joint Size > 1.5mm

*Install the offset the width of the plank. For professional installation, the use of leveling spacers for all plank and rectangular (ie. 12x24) format tiles is recommended.

EDGE: Straight/Pressed Rustic Rectified

FINISH: Matte Polished Structured Honed Semi-Polished

Porcelain Type

through-body color-bodied glazed unglazed double-loaded other _____

Shade Variation

V1 Uniform Appearance V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

THICKNESS: 9mm # OF FACES: 28

Slip Resistance

DCOF >.42

Values	Applications
0.42	Recommended Standard DCOF value for wet/dry commercial flooring
0.65	Recommended Standard DCOF value for ADA ramps

DIN 51130 *R9: Industry Standard/ADA Requirements **R11: Recommended For Exteriors

R9* (3-10°) R10 (10-19°) R11** (19-27°) R12 (27-35°) R13 (>35°)

DIN 51097 Class	Typical Applications	Critical Angle
<input type="checkbox"/> A	Barefoot, but mainly dry aisles and walkways, dry changing areas	≥12°
<input type="checkbox"/> B	Shower rooms, pool surrounds, wet changing areas, disinfectant spray areas (plus all Class A areas)	≥18°
<input type="checkbox"/> C	Areas constantly under water, e.g. steps into pools, foot baths, included pool surrounds, jacuzzis (plus all Class A&B areas)	≥24°

ASTM C-1028
 ANSI A137.1
 DIN 51097/51130

Scratch Resistance

MINERAL

1. Talc (Talc)	6. Microline (Glass, Glazed Tile)
2. Gypsum (Fingernail)	7. Quartz (Unglazed Porcelain)
3. Calcite (Penny)	8. Topaz (Granite)
4. Flourite (Some Marbles)	9. Corundum (Ruby)
5. Apatite (Knife Blade)	10. Diamond (Diamond)

Industry standard ≤175mm²

MOH'S SCALE
 UNI EN ISO 10545.6

5

Wear Resistance

PEI RATING
 UNI EN ISO 10545.7

Class 1: Walls only
 Class 2: Residential floors w/minimal abrasive traffic
 Class 3: Residential interiors/light commercial traffic
 Class 4: Medium commercial applications
 Class 5: All commercial applications/heavy traffic

*Wear can vary greatly. please consult with a professional.

Stain Resistance

ASTM C1378-04
 UNI EN ISO 10545.14

5: Removed after 5 minutes (hot water running)
 4: Removed by manual cleaning (weak detergent)
 3: Removed by mechanical cleaning (strong detergent)
 2: Removed by immersion (24 hrs in suitable solvent)
 1: Stain not removed

Water Absorption

ASTM C-373
 UNI EN ISO 10545.3

Absorbs 0-.5% Absorbs .5-3% Absorbs 3-7% Absorbs 7% +

Category	Properties
Impervious	Interior/Exterior Frost Resistant
Vitreous	Interior/Exterior Frost Resistant
Semi-Vitreous	Indoor Use Only
Non-Vitreous	Indoor Use Only

Breaking Strength

ASTM C648
 UNI EN ISO 10545.4

PASS

Industry standard should be greater than 250 lbs or 50 N/MM²

Facial Dimension

ASTM c499-09
 UNI EN ISO 10545.02

	Standard	Tolerance	Result
flatness	±5mm	±.5%	PASS
thickness	±6mm	±.5%	PASS
straightness	±4.5mm	±.5%	PASS
squareness	±5.4mm	±.6%	PASS
sides L/W	±1.1mm / ±4.5mm	±.5%	PASS

Chemical Resistance

ASTM C650
 UNI EN ISO 10545.13



Allowances for: result

Acid: PASS
 Bases: PASS
 Chemicals: PASS

Leed Information



REQUIREMENTS FOR COMMERCIAL INTERIORS/NEW CONSTRUCTION

Category	Requirement	Points
Sustainable Sites	Site selection	1 Point
	SS CREDIT 1 Heat Island Effect-non roof Material with a solar reflectant index of at least 29.	<input type="checkbox"/>
Energy & Atmosphere	EA CREDIT 4 Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FT	1 Point
	Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FT	<input type="checkbox"/>
Indoor Environmental Quality	Low-Emitting Materials-Flooring Systems	1 Point
	IEQ CREDIT 3.1-7 Green Cleaning: Reducing occupants exposure to hazardous cleaning chemicals.	<input type="checkbox"/>
IEQ CREDIT 4.1	Low Emitting Adhesives: Products less than 65 G/L VOC	<input type="checkbox"/>
	IEQ CREDIT 4.3 Low Emitting Materials: Flooring systems.	<input type="checkbox"/>
Materials & Resources	M&R CREDIT 2 Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	1 Point
	M&R CREDIT 2 Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	50% <input type="checkbox"/> 70% <input type="checkbox"/>
M&R CREDIT 4.1-4.2	Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	1 Point
	Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	10% <input type="checkbox"/> 20% <input type="checkbox"/>
M&R CREDIT 5	Regional Materials: Materials manufactured within 500 miles of the project site.	1 Point
	Regional Materials: Materials manufactured within 500 miles of the project site.	10% <input type="checkbox"/> 20% <input type="checkbox"/>
Innovation in Design	Innovation in Design	1-5 Points
	ID CREDIT 1 Innovation in Design Measurable exemplary environmental performance.	<input type="checkbox"/>

Type: 12x24 Porcelain Stone

Product Line: Aurora

The marketing name for this product is property of CobsA-USA. This same product may be marketed under different names.

Suggested Applications

Floor Wall Residential Light Commercial Heavy Commercial Exterior Pools

*Wear can vary greatly. please consult with a professional.

Installation Suggestions

Plank Installation* Modular Setting Joint Size > 1.5mm

*Install the offset the width of the plank. For professional installation, the use of leveling spacers for all plank and rectangular (ie. 12x24) format tiles is recommended.

EDGE: Straight/Pressed Rustic Rectified

FINISH: Matte Polished Structured Honed Semi-Polished

Porcelain Type

through-body color-bodied glazed unglazed double-loaded other

Shade Variation

V1 Uniform Appearance V2 Slight Variation V3 Moderate Variation V4 Substantial Variation

THICKNESS: 10.5mm # OF FACES: 12

Slip Resistance

DCOF	Values	Applications
>.42	0.42	Recommended Standard DCOF value for wet/dry commercial flooring
	0.65	Recommended Standard DCOF value for ADA ramps

DIN 51130 *R9: Industry Standard/ADA Requirements **R11: Recommended For Exteriors

R9* (3-10°) R10 (10-19°) R11** (19-27°) R12 (27-35°) R13 (>35°)

DIN 51097

Class	Typical Applications	Critical Angle
<input type="checkbox"/> A	Barefoot, but mainly dry aisles and walkways, dry changing areas	≥12°
<input type="checkbox"/> B	Shower rooms, pool surrounds, wet changing areas, disinfectant spray areas (plus all Class A areas)	≥18°
<input type="checkbox"/> C	Areas constantly under water, e.g. steps into pools, foot baths, inclined pool surrounds, jacuzzis (plus all Class A&B areas)	≥24°

ASTM C-1028
 ANSI A137.1
 DIN 51097/51130

Scratch Resistance

MOH'S SCALE
 UNI EN ISO 10545.6

5

MINERAL

1. Talc (Talc)	6. Microline (Glass, Glazed Tile)
2. Gypsum (Fingernail)	7. Quartz (Unglazed Porcelain)
3. Calcite (Penny)	8. Topaz (Granite)
4. Flourite (Some Marbles)	9. Corundum (Ruby)
5. Apatite (Knife Blade)	10. Diamond (Diamond)

Industry standard ≤175mm²

Wear Resistance

PEI RATING
 UNI EN ISO 10545.7

- Class 1: Walls only
 - Class 2: Residential floors w/minimal abrasive traffic
 - Class 3: Residential interiors/light commercial traffic
 - Class 4: Medium commercial applications
 - Class 5: All commercial applications/heavy traffic
- *Wear can vary greatly. please consult with a professional.

Stain Resistance

ASTM C1378-04
 UNI EN ISO 10545.14

- 5: Removed after 5 minutes (hot water running)
- 4: Removed by manual cleaning (weak detergent)
- 3: Removed by mechanical cleaning (strong detergent)
- 2: Removed by immersion (24 hrs in suitable solvent)
- 1: Stain not removed

Water Absorption

ASTM C-373
 UNI EN ISO 10545.3

	<input checked="" type="checkbox"/> Absorbs 0-.5%		<input type="checkbox"/> Absorbs .5-3%		<input type="checkbox"/> Absorbs 3-7%		<input type="checkbox"/> Absorbs 7% +
	Impervious Interior/Exterior Frost Resistant		Vitreous Interior/Exterior Frost Resistant		Semi-Vitreous Indoor Use Only		Non-Vitreous Indoor Use Only

Breaking Strength

ASTM C648
 UNI EN ISO 10545.4

PASS

Industry standard should be greater than
 250 lbs
 or
 50 N/MM²

Facial Dimension

ASTM c499-09
 UNI EN ISO 10545.02

	Standard	Tolerance	Result
flatness	±5mm	±.5%	PASS
thickness	±6mm	±.5%	PASS
straightness	±4.5mm	±.5%	PASS
squareness	±5.4mm	±.6%	PASS
sides L/W	±1.1mm ±4.5mm	±.5%	PASS

Chemical Resistance

ASTM C650
 UNI EN ISO 10545.13



Allowances for:

	result
Acid	PASS
Bases	PASS
Chemicals	PASS

Leed Information



REQUIREMENTS
 FOR COMMERCIAL
 INTERIORS/NEW
 CONSTRUCTION

Sustainable Sites	1 Point	2 Points
Site selection	1 Point	
SS CREDIT 1 Heat Island Effect-non roof Material with a solar reflectant index of at least 29.	<input type="checkbox"/>	
Energy & Atmosphere	1 Point	
EA CREDIT 4 Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FIT	<input type="checkbox"/>	
Indoor Environmental Quality	1 Point	
Low-Emitting Materials-Flooring Systems	1 Point	
IEQ CREDIT 3.1-7 Green Cleaning: Reducing occupants exposure to hazardous cleaning chemicals.	<input type="checkbox"/>	
IEQ CREDIT 4.1 Low Emitting Adhesives: Products less than 65 G/L VOC	<input type="checkbox"/>	
IEQ CREDIT 4.3 Low Emitting Materials: Flooring systems.	<input type="checkbox"/>	
Materials & Resources	1 Point	2 Points
M&R CREDIT 2 Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	50% <input type="checkbox"/>	70% <input type="checkbox"/>
M&R CREDIT 4.1-4.2 Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
M&R CREDIT 5 Regional Materials: Materials manufactured within 500 miles of the project site.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
Innovation in Design		1-5 Points
ID CREDIT 1 Innovation in Design Measurable exemplary environmental performance.		<input type="checkbox"/>

Type: 24x48 Porcelain Stone

Product Line: Aurora

The marketing name for this product is property of Cobas USA. This same product may be marketed under different names.



NEW YORK | NEW JERSEY | MIAMI