



Flat Iron glass tile



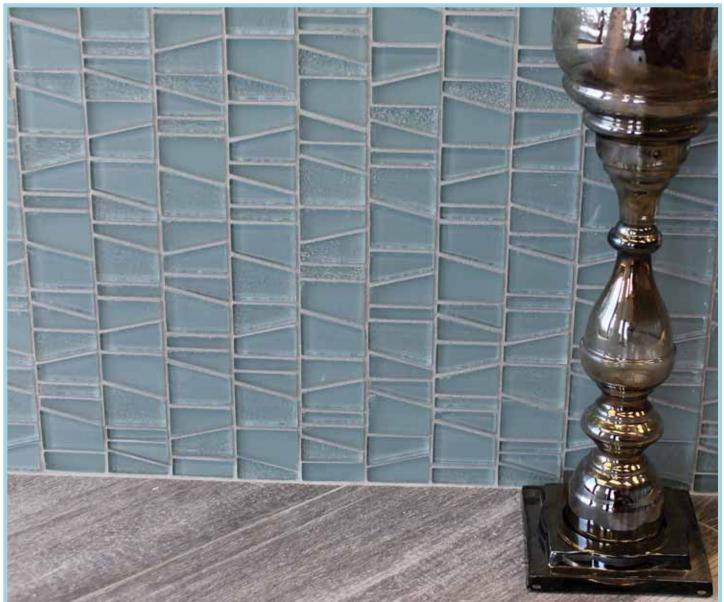


GLASS TILE

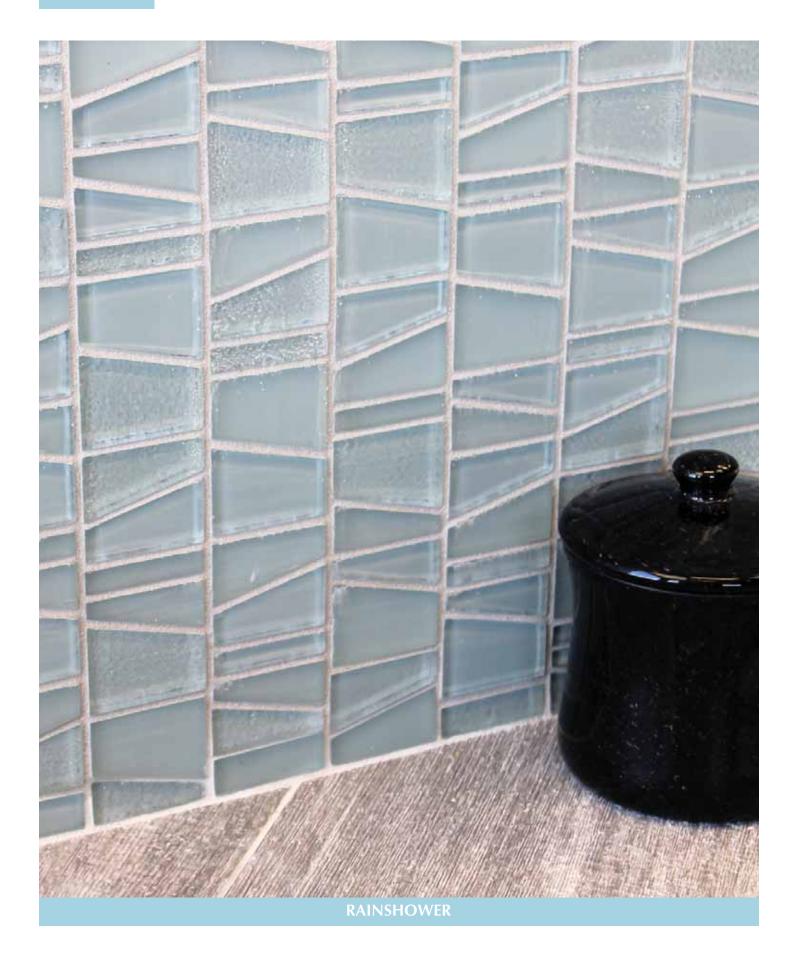


Trapezoid Mosaics

CASHMERE



GLA FICA TRAP

RAINSHOWER



GLA FIRA TRAP

TRUFFLE



GLA FITR TRAP

WHITE



GLA FIWH TRAP

COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors / Patios					
Walls / Backsplashes	X	X	X	X	X
Countertops					
Pool Decking					
Pool Linings	X	X	X	X	X

Suitable in freezing and non-freezing climates when proper installation methods are followed.

INSTALLATION

Thickness	1/4″
Grout Joint Recommendation	1/8" Approximately

TEST RESULTS

	ASTM#	RESULT
Water Absorption	C373	< 0.01 %
Breaking Strength	C648	> 100 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant

1085 PORTION RD. FARMINGVILLE, NY 11738

7 ELKINS RD. E. BRUNSWICK, NJ 08816