


Arcwood

porcelain stoneware



COBSA-USA

NEW YORK | NEW JERSEY | MIAMI

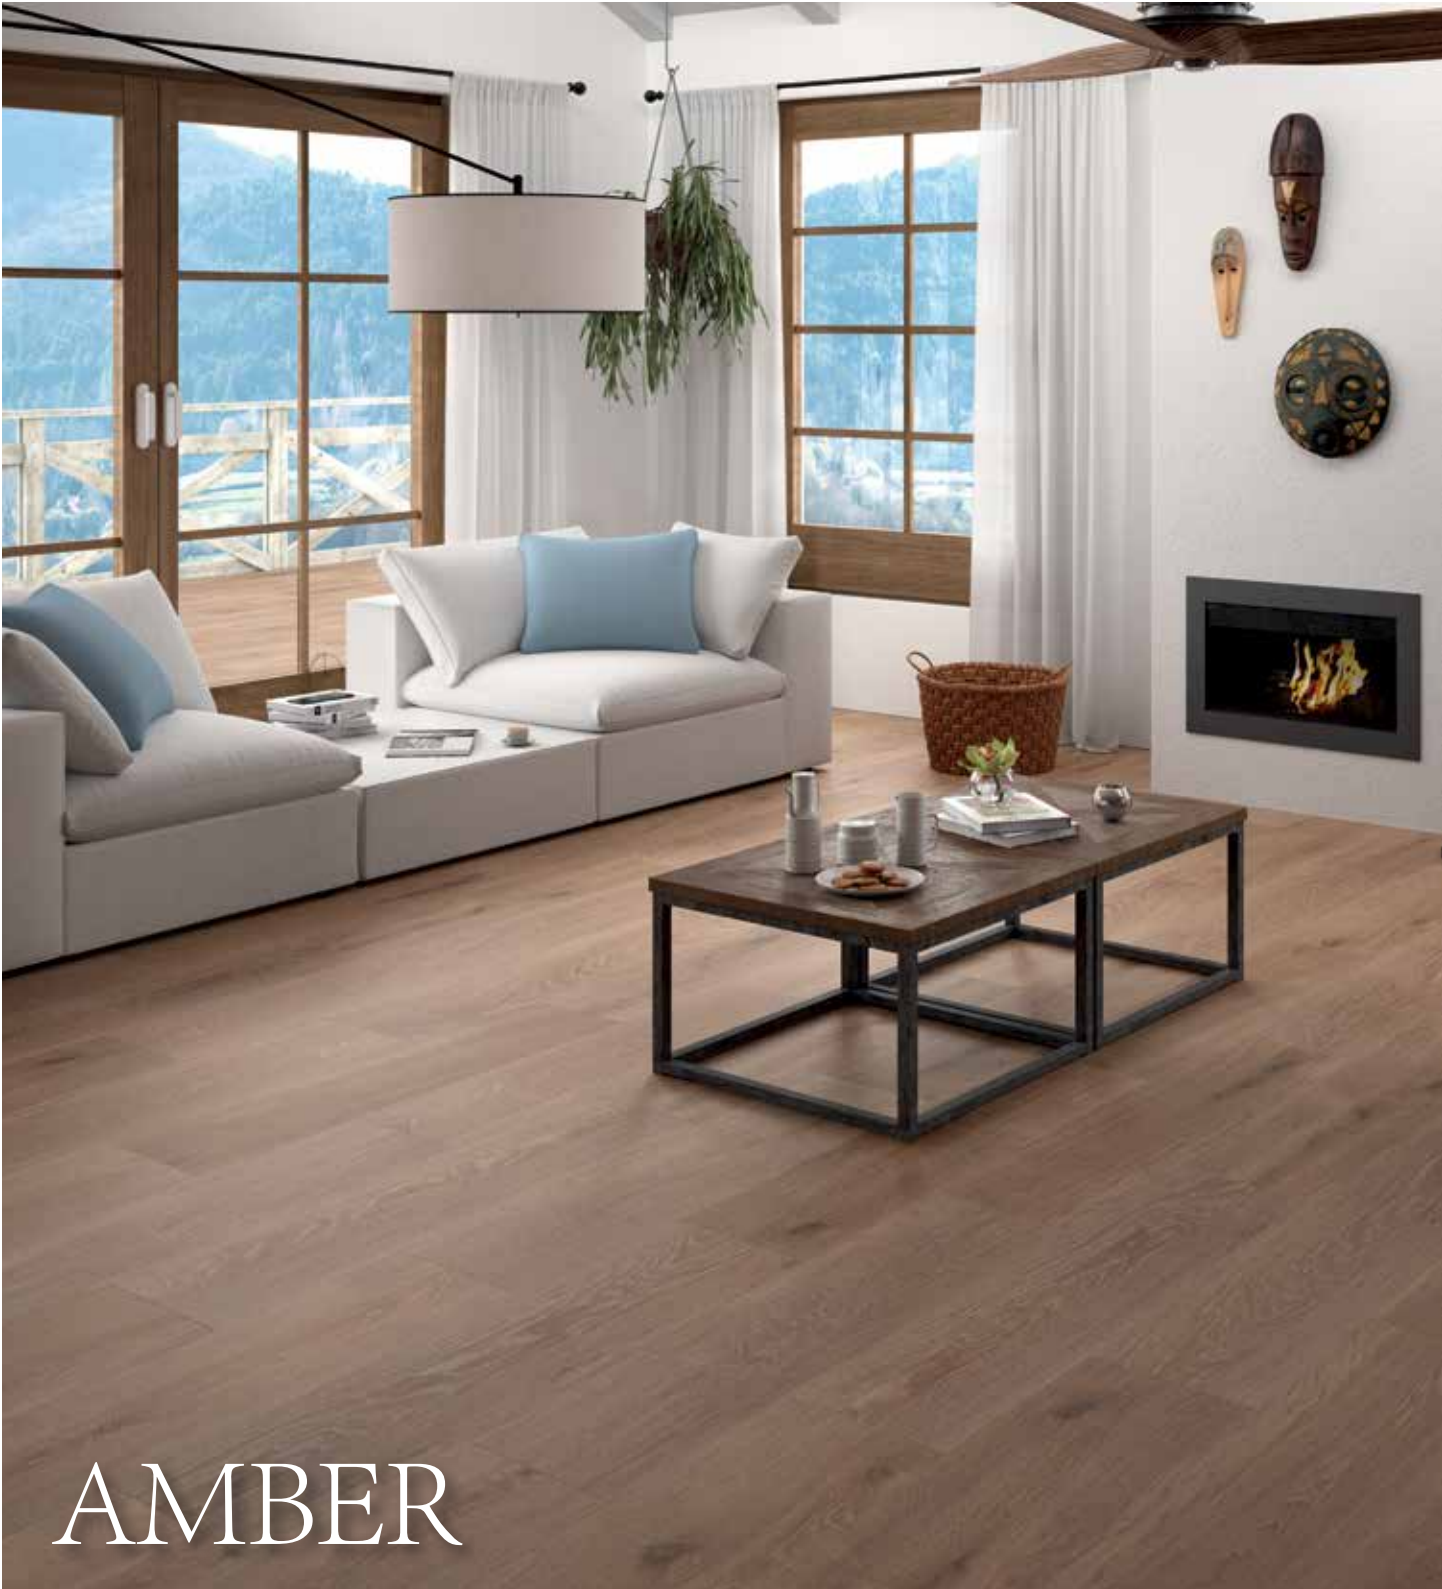

AMBER

COPARAM636



| 6 x 36 |



ARGENT

COPARAR636



| 6 x 36 |



CAMEL

COPARCA636



| 6 x 36 |



COPARGR636



| 6 x 36 |




MOCHA

COPARMO636




| 6 x 36 |


Suggested Applications




Installation Suggestions



Porcelain Type



Shade Variation



Slip Resistance

DCOF	Values	Applications
<input checked="" type="checkbox"/> .67	0.42	Recommended Standard DCOF value for wet/dry commercial flooring
	0.65	Recommended Standard DCOF value for ADA ramps

DIN 51130 *R9: Industry Standard/ADA Requirements **R11: Recommended For Exteriors

R9* (3-10°)
 R10 (10-19°)
 R11** (19-27°)
 R12 (27-35°)
 R13 (>35°)

DIN 51097

Class	Typical Applications	Critical Angle
<input checked="" type="checkbox"/> A	Barefoot, but mainly dry aisles and walkways, dry changing areas	≥12°
<input type="checkbox"/> B	Shower rooms, pool surrounds, wet changing areas, disinfectant spray areas (plus all Class A areas)	≥18°
<input type="checkbox"/> C	Areas constantly under water, e.g. steps into pools, foot baths, included pool surrounds, jacuzzis (plus all Class A&B areas)	≥24°

ASTM C-1028
 ANSI A137.1
 DIN 51097/51130

Scratch Resistance

MOH'S SCALE
 UNI EN ISO
 10545.6

7

MINERAL

- | | |
|----------------------------|-----------------------------------|
| 1. Talc (Talc) | 6. Microline (Glass, Glazed Tile) |
| 2. Gypsum (Fingernail) | 7. Quartz (Unglazed Porcelain) |
| 3. Calcite (Penny) | 8. Topaz (Granite) |
| 4. Flourite (Some Marbles) | 9. Corundum (Ruby) |
| 5. Apatite (Knife Blade) | 10. Diamond (Diamond) |
- Industry standard ≤175mm²

Wear Resistance

PEI RATING
 UNI EN ISO
 10545.7

- Class 1: Walls only
 Class 2: Residential floors w/minimal abrasive traffic
 Class 3: Residential interiors/light commercial traffic
 Class 4: Medium commercial applications
 Class 5: All commercial applications/heavy traffic
- *Wear can vary greatly. please consult with a professional.

Stain Resistance


ASTM C1378-04
 UNI EN ISO
 10545.14

5

- 5: Removed after 5 minutes (hot water running)
 4: Removed by manual cleaning (weak detergent)
 3: Removed by mechanical cleaning (strong detergent)
 2: Removed by immersion (24 hrs in suitable solvent)
 1: Stain not removed

Water Absorption

ASTM C-373
 UNI EN ISO
 10545.3

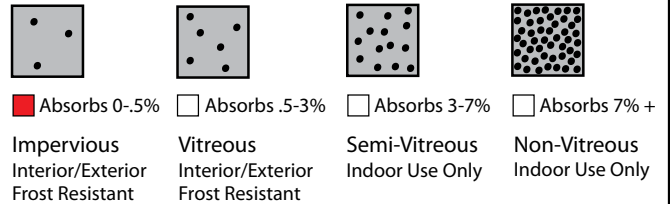

Breaking Strength

ASTM C648
 UNI EN ISO
 10545.4



Facial Dimension

ASTM C499-09
 UNI EN ISO
 10545.02

	Standard	Tolerance	Result
flatness	±5mm	±.5%	-0.08%
thickness	±6mm	±.5%	-4%
straightness	±4.5mm	±.5%	-0.05%
squareness	±5.4mm	±.6%	-0.10%
sides L/W	±1.1mm ±4.5mm	±.5%	-0.05%

Chemical Resistance

ASTM C650
 UNI EN ISO
 10545.13



Allowances for:

result
 Acid
 Bases
 Chemicals

Leed Information



REQUIREMENTS
 FOR COMMERCIAL
 INTERIORS/NEW
 CONSTRUCTION

Sustainable Sites	1 Point
Site selection	
SS CREDIT 1 Heat Island Effect-non roof Material with a solar reflectant index of at least 29.	<input type="checkbox"/>
Energy & Atmosphere	1 Point
EA CREDIT 4 Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FT	<input type="checkbox"/>
Indoor Environmental Quality	1 Point
Low-Emitting Materials-Flooring Systems	
IEQ CREDIT 3.1-7 Green Cleaning: Reducing occupants exposure to hazardous cleaning chemicals.	<input checked="" type="checkbox"/>
IEQ CREDIT 4.1 Low Emitting Adhesives: Products less than 65 G/L VOC	<input type="checkbox"/>
IEQ CREDIT 4.3 Low Emitting Materials: Flooring systems.	<input checked="" type="checkbox"/>

Materials & Resources	1 Point	2 Points
M&R CREDIT 2 Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	50% <input checked="" type="checkbox"/>	70% <input type="checkbox"/>
M&R CREDIT 4.1-4.2 Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
M&R CREDIT 5 Regional Materials: Materials manufactured within 500 miles of the project site.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
Innovation in Design	1-5 Points	
ID CREDIT 1 Innovation in Design Measurable exemplary environmental performance.	<input type="checkbox"/>	

Type: **Porcelain Stoneware**

Product Line: **Arcwood**

The marketing name for this product is property of Cobsa-USA. This same product may be marketed under different names.



COBSA-USA

NEW YORK | NEW JERSEY | MIAMI