



# ITALY


## 2CM PORCELAIN PAVERS



**COBSA USA**  
NEW YORK | NEW JERSEY | MIAMI

# Avatar

ANTRACITE · GRIGIO CHIARO · GRIGIO · TORTORA  
NON-STOCK / SPECIAL ORDER (4-6 WEEKS)

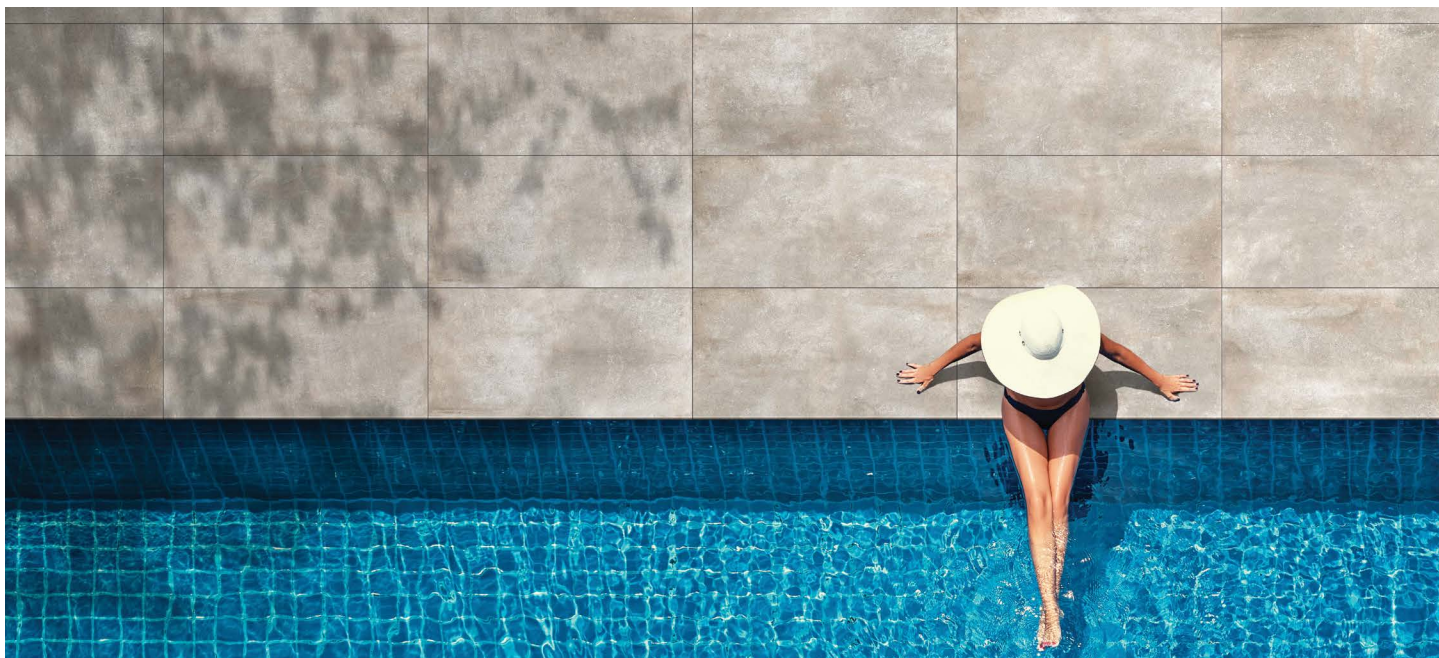

antracite



PAVAVAN24 | 24 x 24 |

grigio chiaro



PAVAVGC24 | 24 x 24 |  
\*48x48 also available

grigio



PAVAVGR24 | 24 x 24 |  
\*48x48 also available

tortora



PAVAVTO24 | 24 x 24 |  
\*48x48 also available



PAVAVAN2448 | 24 x 48 |



PAVAVGC2448 | 24 x 48 |



PAVAVGR2448 | 24 x 48 |



PAVAVTO2448 | 24 x 48 |

# Blue Stone

BLACK · GRAY

NON-STOCK / SPECIAL ORDER (4-6 WEEKS)



PAVBSSB24



black

| 24 x 24 |

PAVBSSG24



gray

| 24 x 24 |

# Element

DUNE · NUIT · OPAL · TAUPE  
NON-STOCK / SPECIAL ORDER (6-8 WEEKS)



PAVELTA32



taupe | 32 x 32 |

PAVELTA24



taupe | 24 x 24 |

PAVELTA2448



taupe | 24 x 48 |

PAVELDU32



dune | 32 x 32 |

PAVELDU24



dune | 24 x 24 |

PAVELDU2448



dune | 24 x 48 |




PAVELNU32



nuit | 32 x 32 |

PAVELNU24



nuit | 24 x 24 |

PAVELNU2448



nuit | 24 x 48 |

PAVELOP32



opal | 32 x 32 |

PAVELOP24



opal | 24 x 24 |

PAVELOP2448



opal | 24 x 48 |


*Primi*

CEMENTO · CENERE · SANDALO

NON-STOCK / SPECIAL ORDER (6-8 WEEKS)



PAVPMCM32

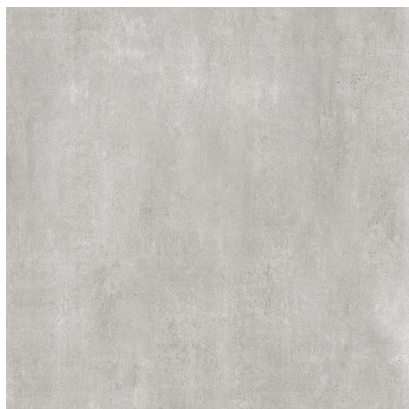

cemento

| 32 x 32 |

PAVPMCM24



cemento


| 24 x 24 |

PAVPMCM1648




cemento

| 16 x 48 |

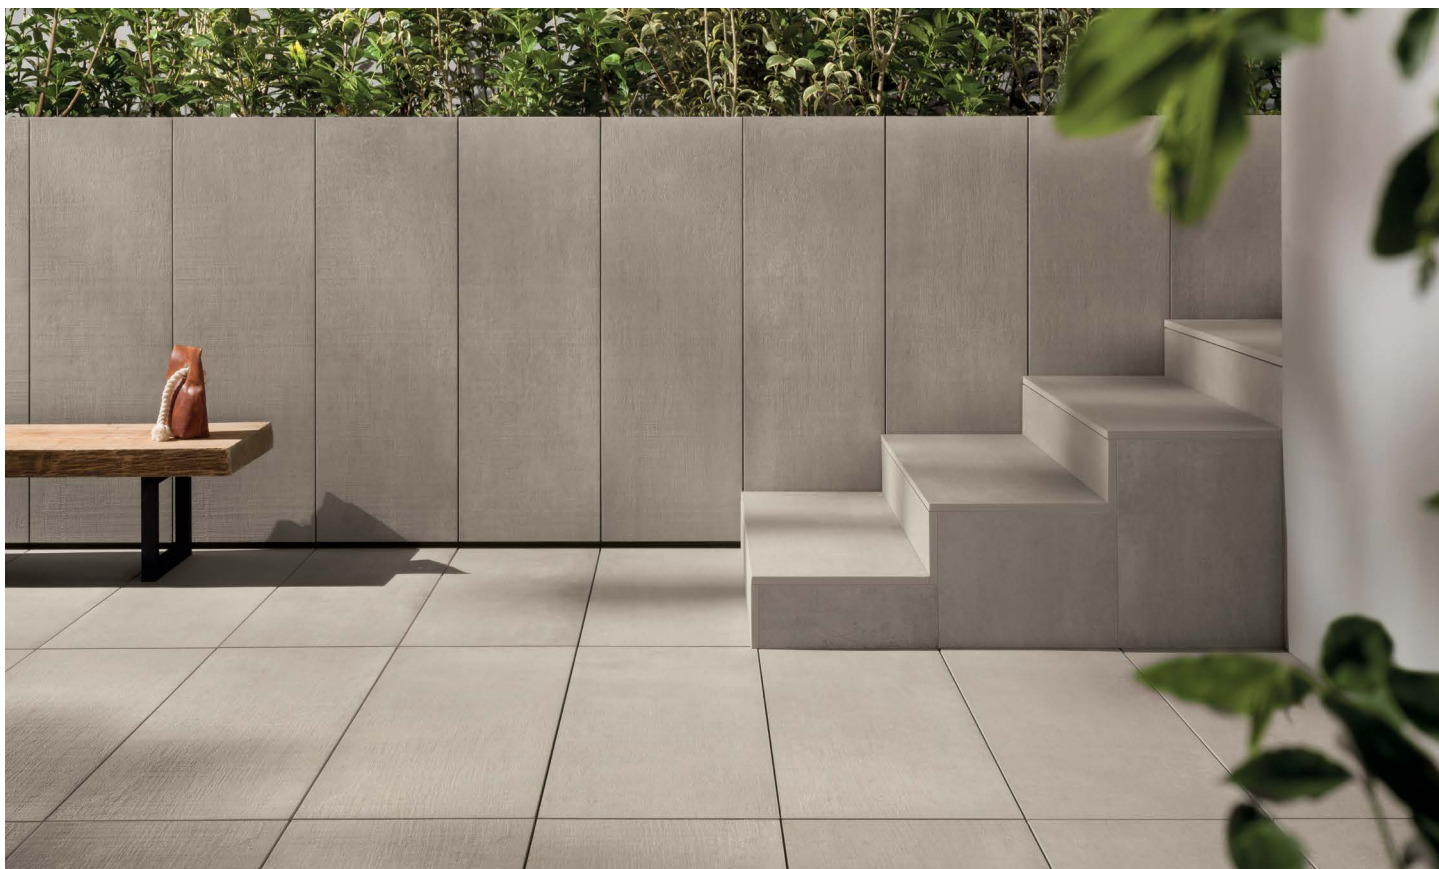

PAVPMCN32

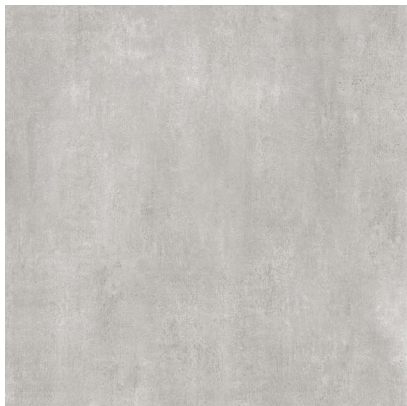

cenere

| 32 x 32 |

PAVPMCN24



cenere

| 24 x 24 |

PAVPMCN1648



cenere

| 16 x 48 |

PAVPMSA32



sandalo

| 32 x 32 |

PAVPMSA24



sandalo

| 24 x 24 |

PAVPMSA1648



sandalo

| 16 x 48 |

# Soap Stone

DARK · LIGHT

NON-STOCK / SPECIAL ORDER (4-6 WEEKS)



PAVSSDA2448  
PAVSSDA1632

PAVSSLI2448  
PAVSSLI1632



dark | 24 x 48, 16 x 32 |



light | 24 x 48, 16 x 32 |

*Sol*

BEIGE · GRIGIO · NERO

NON-STOCK / SPECIAL ORDER (4-6 WEEKS)



PAVSOBE24



beige

| 24 x 24 |

PAVSOGR24



grigio

| 24 x 24 |

PAVSONE24



nero

| 24 x 24 |

# Wood MAPLE

NON-STOCK / SPECIAL ORDER (5-6 WEEKS)



PAVWOMA24



| 24 x 24 |

PAVWOMA848



| 8 x 48 |

PAVWOMA1648




| 16 x 48 |

# Wood NUT

NON-STOCK / SPECIAL ORDER (5-6 WEEKS)



PAVWONU24

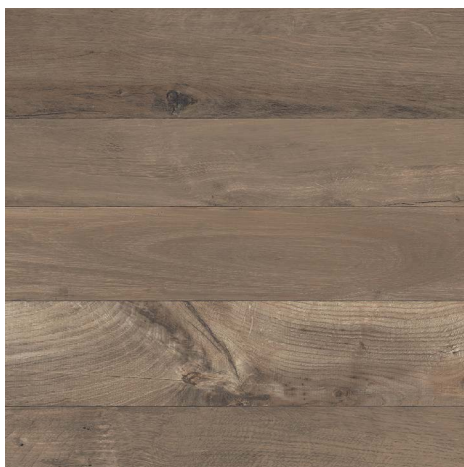

| 24 x 24 |

PAVWONU848



| 8 x 48 |

PAVWONU1648



| 16 x 48 |

# Wood OAK

NON-STOCK / SPECIAL ORDER (5-6 WEEKS)



PAVWOOA24



| 24 x 24 |

PAVWOOA848



| 8 x 48 |

PAVWOOA1648



| 16 x 48 |

# *Zenith* GRIGIO

NON-STOCK / SPECIAL ORDER (4-6 WEEKS)




PAVZEGR2436




grigio

| 24 x 36 |

# WHERE TO INSTALL 2CM PORCELAIN PAVERS




Sidewalk cafes




Walkways and pathways



Gardens and patios




Garden paths




Beach resorts




Swimming-pools




Terraces and balconies




Gazebos




Exhibitions and events



Public parks



Public parkings

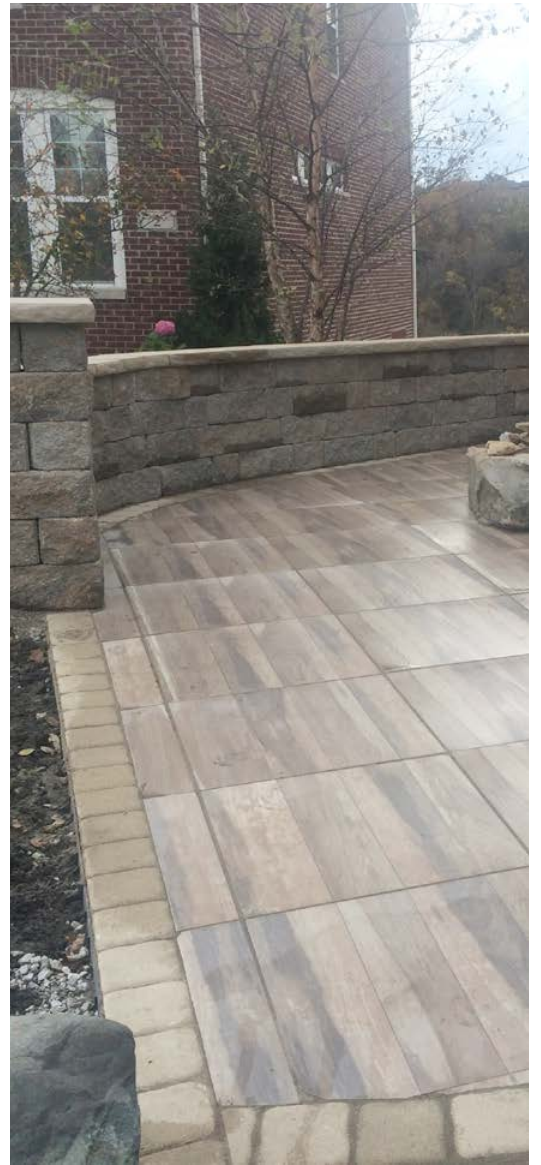

# WHY CHOOSE 2CM PORCELAIN PAVERS



Thermal shock resistant.  
(-40°F - 210°F)



Superior in fire resistance  
and durability to wood tiles



Easy to clean. Stain,  
chemical and salt resistant




Superior in strength and  
impact resistance to  
ceramic tiles (supports over  
2000lb), lighter and easier  
to handle than concrete  
blocks



Virtually no maintenance




Slip resistant and quick  
draining




Easy to install



Removable and reusable  
POPA 2.0 is ideal both for  
temporary flooring and for  
permanent flooring




Versatile installation.  
Various installation methods  
including pedestal set,  
gravel and grass set.  
They offer endless  
opportunities for landscape  
design creativity in both  
domestic and commercial  
applications.




Fade resistant



Available in a broad range  
of colors/styles




Massive over life cost  
savings more cost effective  
than grating or grid  
structures for elevated  
paving installations




Resistant to salt corrosion.



Resistant to attack from mould, moss and verdigris treatments.




Resistant to efflorescence and other marks.



Durable: resistant to heavy vehicle and pedestrian traffic.



Frost-proof.



Hypoallergenic. No VOC.



Easy to sterilize.



Eco-friendly maintenance.



Easy to clean.



Recyclable and ecological.



New solution in extra-thick porcelain stoneware for outdoor trilling. 2 cm thick, colored fine porcelain stoneware slabs obtained from atomizing high-class clays, quartzes and metal oxides pressed at 400 kg/cm<sup>2</sup>, completely sintered at a temperature of 1200°C and then squared using a system of abrasive grinders.

# TECHNICAL CHARACTERISTICS OF 2CM PORCELAIN PAVERS

| Characteristic                 |             | Test Method       | Value*               |
|--------------------------------|-------------|-------------------|----------------------|
| Thickness                      |             |                   | 3/4"                 |
| Weight                         |             |                   | 9 lb/sq.ft           |
| Water absorption               |             | ISO10545-3        | <0.1%                |
| Breaking strength              |             | ISO 10545-4       | > 2200 lbf           |
| Modulus of rupture             |             | ISO 10545-4       | > 7000 psi           |
| Static load capacity *         | center      | EN 12825          | >1700 lbf            |
|                                | side center |                   | > 1200 lbf           |
|                                | diagonal    |                   | > 1500 lbf           |
| Bending strength               |             | EN1339            | Class 14             |
| Impact resistance              |             | ISO 10545-5       | >0.55                |
| Resistance to abrasion         |             | ISO 10545-6       | conforms             |
| Resistance to abrasion         |             | ISO 10545-6       | conforms             |
| Frost resistant                |             | ISO 10545-12      | resistant            |
| Resistance to thermal shock    |             | ISO 10545-9       | resistant            |
| Resistance to chemicals        |             | ISO 10545-13      | UA                   |
| Resistance to acids & alkalis  |             | ISO 10545-13      | ULA/UHA              |
| Resistance to staining         |             | ISO 10545-14      | Class 5              |
| Fire resistance                |             | EN3501-1          | A1-A1 FL             |
| Barefoot ramp test             |             | DIN 51097         | A+B+C                |
| Shod ramp test                 |             | DIN 51130         | R11                  |
| Static coefficient of friction |             | ASTM C1028-2007   | >0.6 wet<br>>0.6 dry |
| Slip resistance                |             | DM236/89 B.C.R.A. | >0.40                |

\*Average values - compliant with relevant standard


\*\* 24" x 24" pavers



BAGNI CHRISTIAN, RIMINI, ITALY



I'PARK MALL, SEOUL, KOREA

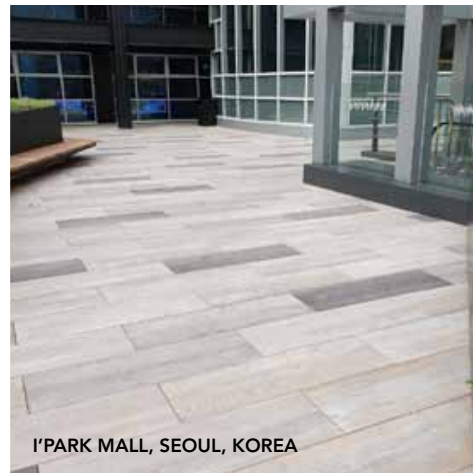

I'PARK MALL, SEOUL, KOREA



ERACLE SPORTS CENTER, COMO, ITALY



BUCAREST, ROMANIA



BRISBANE, AUSTRALIA



RESIDENZA SAN MARTINO, LUGANO, SWITZERLAND



ADMIRAL PARK HOTEL,  
BOLOGNA, ITALY



HOTEL, STOCKHOLM, SWEDEN



PRIVATE HOUSE, POLAND



THE THEATER OF DISAPPEARANCE  
Adrian Villar Rijas  
Metropolitan Museum of Art, New York  
14/04/2017 - 29/10/2017

Photos:  
CANCOS TILE AND STONE

