

CASHMERE

ceramic wall tile



COBSA USA

NEW YORK | NEW JERSEY | MIAMI

Cashmere
BLUE



BELCABL310



-3X10-

BELCABLBN



-.5x10 jolly-

Cashmere
CLOUD



BELCACL310



-3X10-

BELCACLBN



-.5x10 jolly-



Cashmere
GREEN

BELCAGN310



-3X10-

BELCAGNBN



-5x10 jolly-



Cashmere
IVORY

BELCAIV310



-3X10-

BELCAIVBN



-5x10 jolly-

Cashmere SNOW

BELCASN310



-3X10-

BELCASNBN



-.5x10 jolly-




SPECIFICATIONS


Suggested Applications



Installation Suggestions



Shade Variation



Scratch Resistance

MOH'S SCALE
UNI EN ISO
10545.6

3

MINERAL

- Talc (Talc)
 - Gypsum (Fingernail)
 - Calcite (Penny)
 - Flourite (Some Marbles)
 - Apatite (Knife Blade)
 - Microline (Glass, Glazed Tile)
 - Quartz (Unglazed Porcelain)
 - Topaz (Granite)
 - Corundum (Ruby)
 - Diamond (Diamond)
- Industry standard $\leq 175\text{mm}^2$

Wear Resistance

PEI RATING
UNI EN ISO
10545.7

- Class 1: Walls only
 - Class 2: Residential floors w/minimal abrasive traffic
 - Class 3: Residential interiors/light commercial traffic
 - Class 4: Medium commercial applications
 - Class 5: All commercial applications/heavy traffic
- *Wear can vary greatly. please consult with a professional.*

Stain Resistance


ASTM C1378-04
UNI EN ISO
10545.14

5

- Removed after 5 minutes (hot water running)
- Removed by manual cleaning (weak detergent)
- Removed by mechanical cleaning (strong detergent)
- Removed by immersion (24 hrs in suitable solvent)
- Stain not removed

Water Absorption

ASTM C-373
UNI EN ISO
10545.3

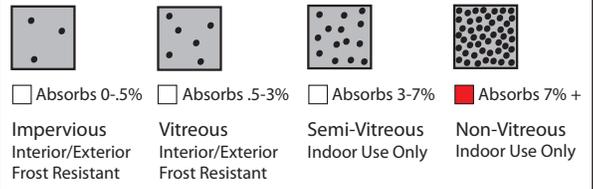

Breaking Strength

ASTM C648
UNI EN ISO
10545.4

450



Facial Dimension

ASTM c499-09
UNI EN ISO
10545.02

	Standard	Tolerance	Result
flatness	$\pm 5\text{mm}$	$\pm .5\%$	PASS
thickness	$\pm 6\text{mm}$	$\pm .5\%$	PASS
straightness	$\pm 4.5\text{mm}$	$\pm .5\%$	PASS
squareness	$\pm 5.4\text{mm}$	$\pm .6\%$	PASS
sides L/W	$\pm 1.1\text{mm}$ $\pm 4.5\text{mm}$	$\pm .5\%$	PASS

Chemical Resistance

ASTM C650
UNI EN ISO
10545.13

Allowances for:

	result
Acid	GA
Bases	GA
Chemicals	GA