

BELLAGIO

porcelain collection



COBSA USA
NEW YORK | NEW JERSEY | MIAMI

BARDIGLIO

Bellagio




ELEBEBA12



-12x12-

ELEBEBAMOS22

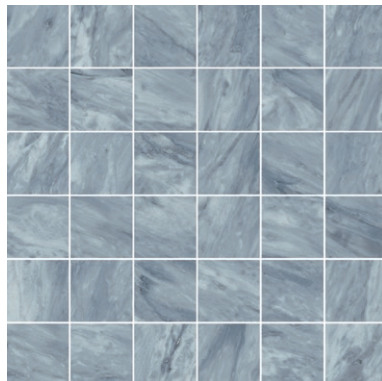

-2x2 mosaic-

ELEBEBAWEAVE



-basketweave mosaic-

Bellagio

BOTTICINO



ELEBEB012



-12x12-

ELEBEBOMOS22




-2x2 mosaic-

CALACATTA GOLD

Bellagio




ELEBECG12

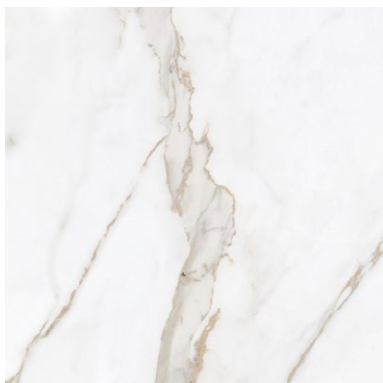

-12x12-

ELEBECGMOS22

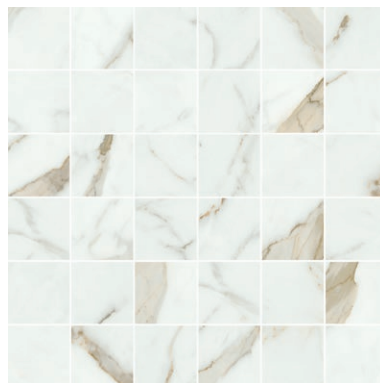


-2x2 mosaic-

Bellagio

CARRARA



ELEBECA12

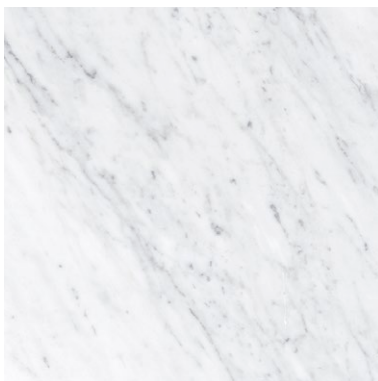

-12x12-

ELEBECAMOS22




-2x2 mosaic-

EMPERADOR

Bellagio




ELEBEE12

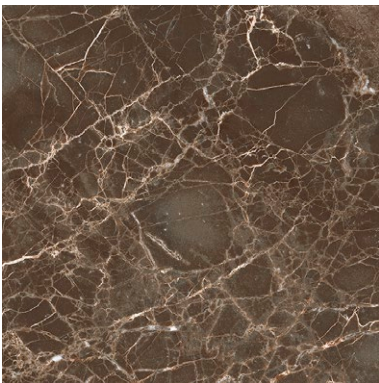

-12x12-

ELEBEE MOS22

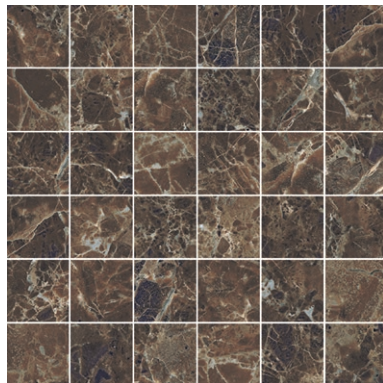

-2x2 mosaic-

ELEBEE WEAVE




-basketweave mosaic-

Bellagio

NERO MARQUINA




ELEBENM12

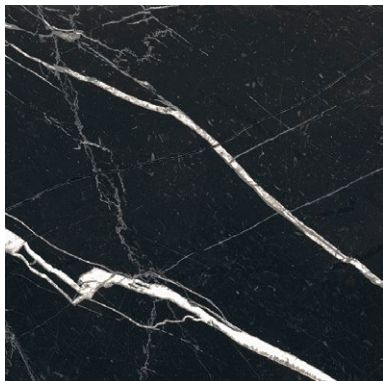

-12x12-

ELEBENMMOS22

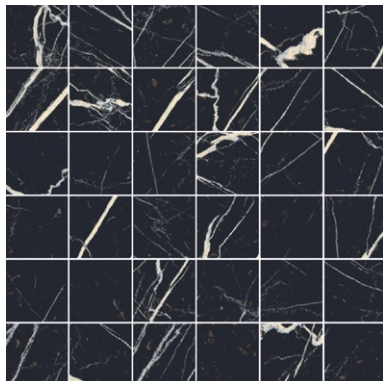

-2x2 mosaic-

ELEBENMWEAVE



-basketweave mosaic-

PIETRA GREY

Bellagio




ELEBEPG12



-12x12-

ELEBEPGMOS22

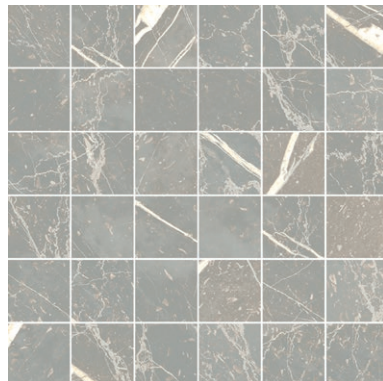

-2x2 mosaic-

ELEBEPGWEAVE




-basketweave mosaic-

Bellagio

ROSSO LEVANTO




ELEBERL12

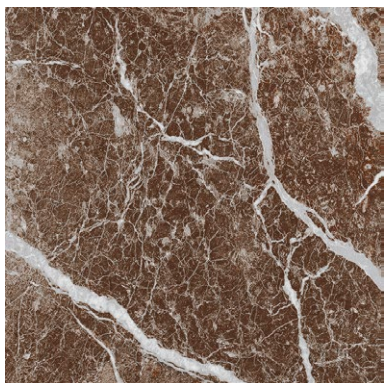

-12x12-

ELEBERLMOS22

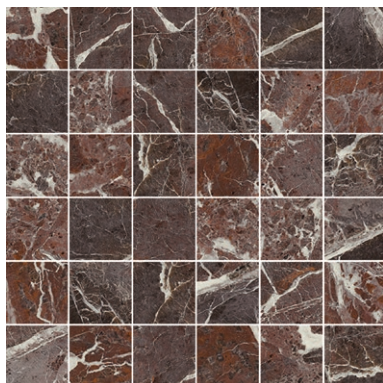

-2x2 mosaic-

ELEBERLWEAVE




-basketweave mosaic-

VERDE ALPI

Bellagio




ELEBEVA12

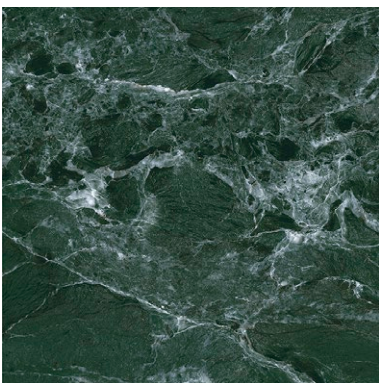

-12x12-

ELEBEVAMOS22

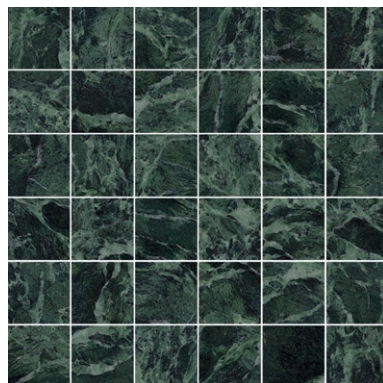

-2x2 mosaic-

ELEBEVAWEAVE




-basketweave mosaic-

TILE

Type	Finish	Thickness	Edge	# Faces
Porcelain Color-Bodied	Matte	9mm	Rectified	see below

Carrara, Botticino, Calacatta Gold, Bardiglio: 64 faces
 Emperador, Verde Alpi: 48 faces
 Rosso Levanto: 40 faces
 Nero Marquina: 80 faces

INSTALLATION

Grout Joint	Setting	Offset %	Shade Variation
1/8"	Stacked		 V3 (Moderate)

PERFORMANCE

	Test Method	Result
Water Absorption	ASTM C373	<0.5%
Breaking Strength	ASTM C648	>35 N/mm ²
Scratch Hardness	MOHS	5
Wear Resistance	ANSI A137.1	see below
Slip Resistance	ASTM C1028	R9, Class A
Chemical Resistance	ASTM C650	Resistant
Stain Resistance	ASTM C1378	5
Thermal Shock Resistance	ASTM C484	Resistant
Freezing Resistance	ASTM C1026	Resistant

Carrara, Botticino: Class 5 Calacatta Gold, Bardiglio: Class 4
 Emperador, Rosso Levanto, Nero Marquina, Verde Alpi: Class 2

APPLICATIONS

	Suitable	DCOF*
Dry & Level - Interior Floor	✓	≥0.42
Wet & Level - Interior Floor	✓	≥0.42
Shower Floors	✓	≥0.42
Exterior Floors (including patios, pool decking and other wet areas with minimal footwear)		
Ramps and Inclines		
Walls & Backsplashes	✓	
Countertops		
Pool Linings	✓	
Residential	✓	
Light Commercial	✓	
Heavy Commercial	see below	

*A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3
Heavy Commercial Use for Carrara and Botticino, only.

NOTES

- Variations occur in all fired ceramic and natural tile products.
- Random visual variation enhances the natural beauty of this product.
- For optimal results:
 - Select tile from multiple cartons.
 - Plan shading and graphic arrangement prior to installation.
- Tile/trim supplied for a particular installation may not match samples exactly.
- Final confirmation of actual tiles and trim should be made prior to installation.
- Products are manufactured in accordance with ANSI A137.1 standards.
- Special care should be taken when grouting with dark pigmented colors.
- Use of a latex-modified thin-set is recommended for installation.

COBSA USA

NEW YORK | NEW JERSEY | MIAMI