

HAVANA


ceramic collection




COBSA USA

NEW YORK | NEW JERSEY | MIAMI

havana BLACK

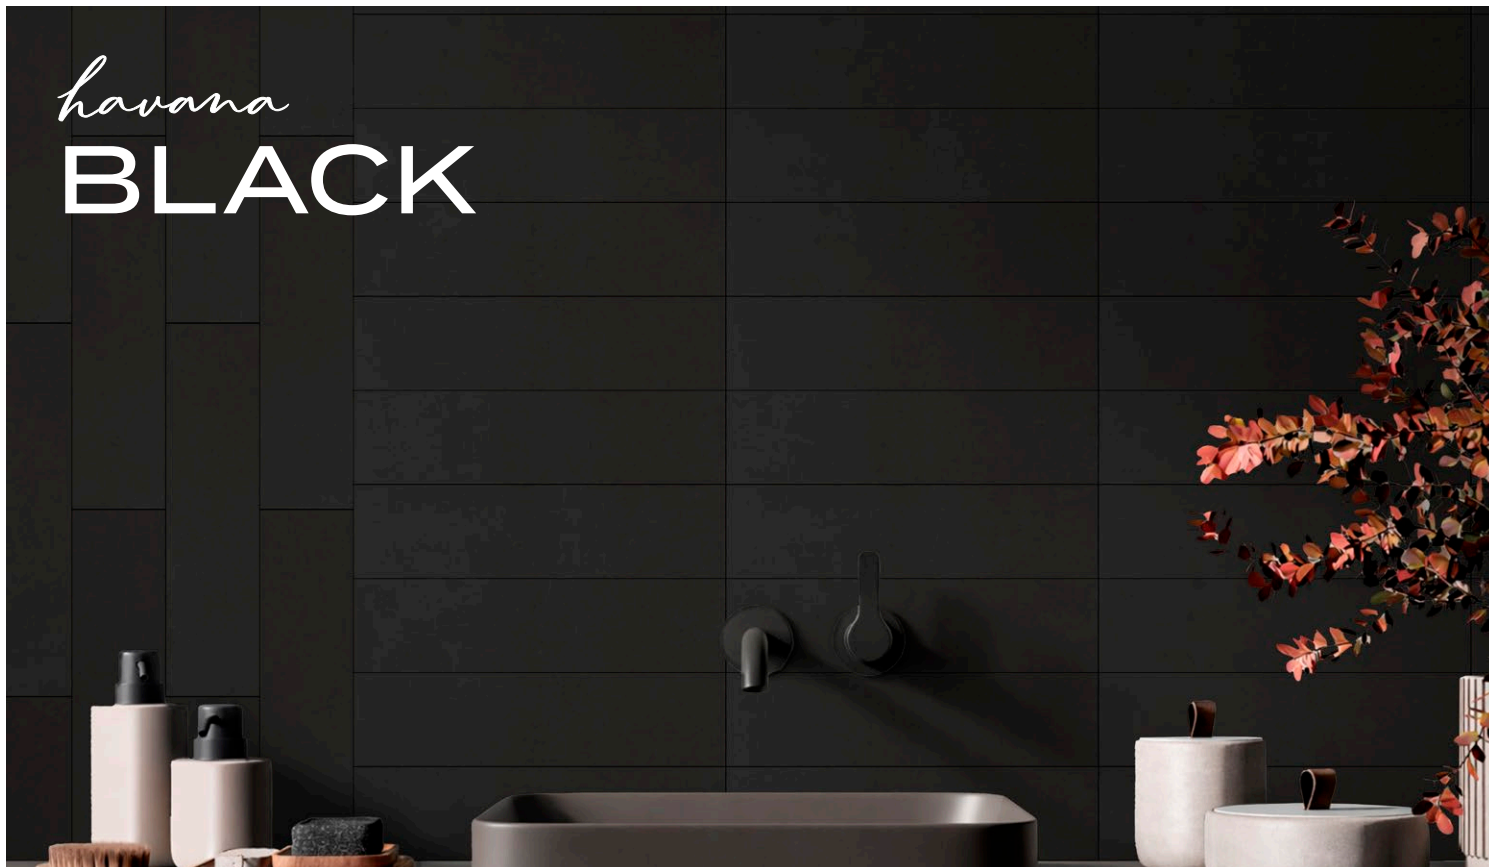


BELHABK312



- 3x12 -

BELHABK312STR



- 3x12 structured -

BELHABKJOLLY



- .5x12 jolly -



havana BLUE



BELHABL312



- 3x12 -

BELHABL312STR



- 3x12 structured -

BELHABKJOLLY




- .5x12 jolly -



havana

FOREST

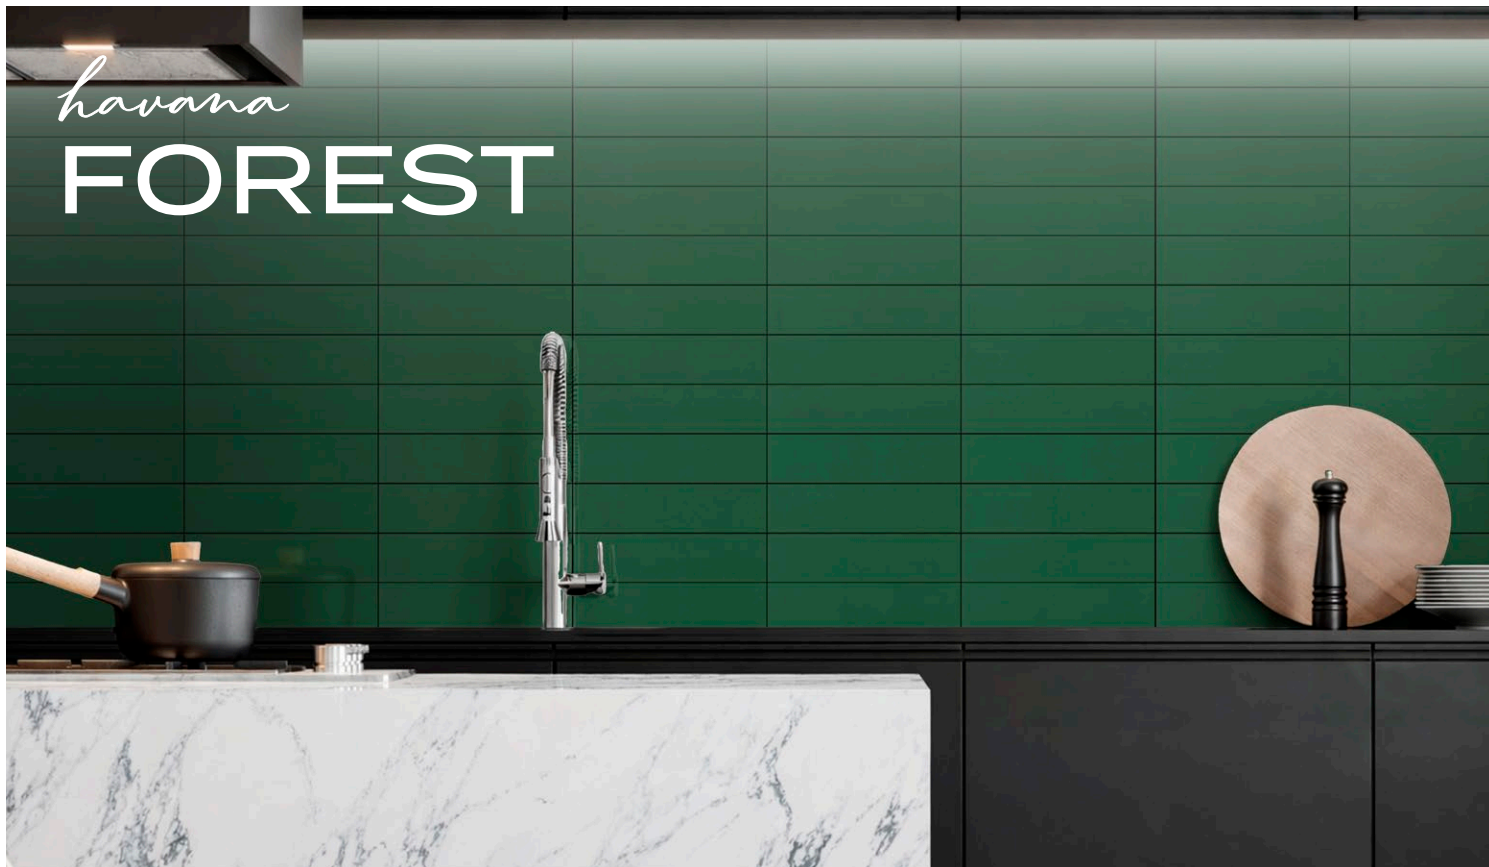

BELHAFO312



- 3x12 -

BELHAFO312STR




- 3x12 structured -

BELHAFOJOLLY



- .5x12 jolly -



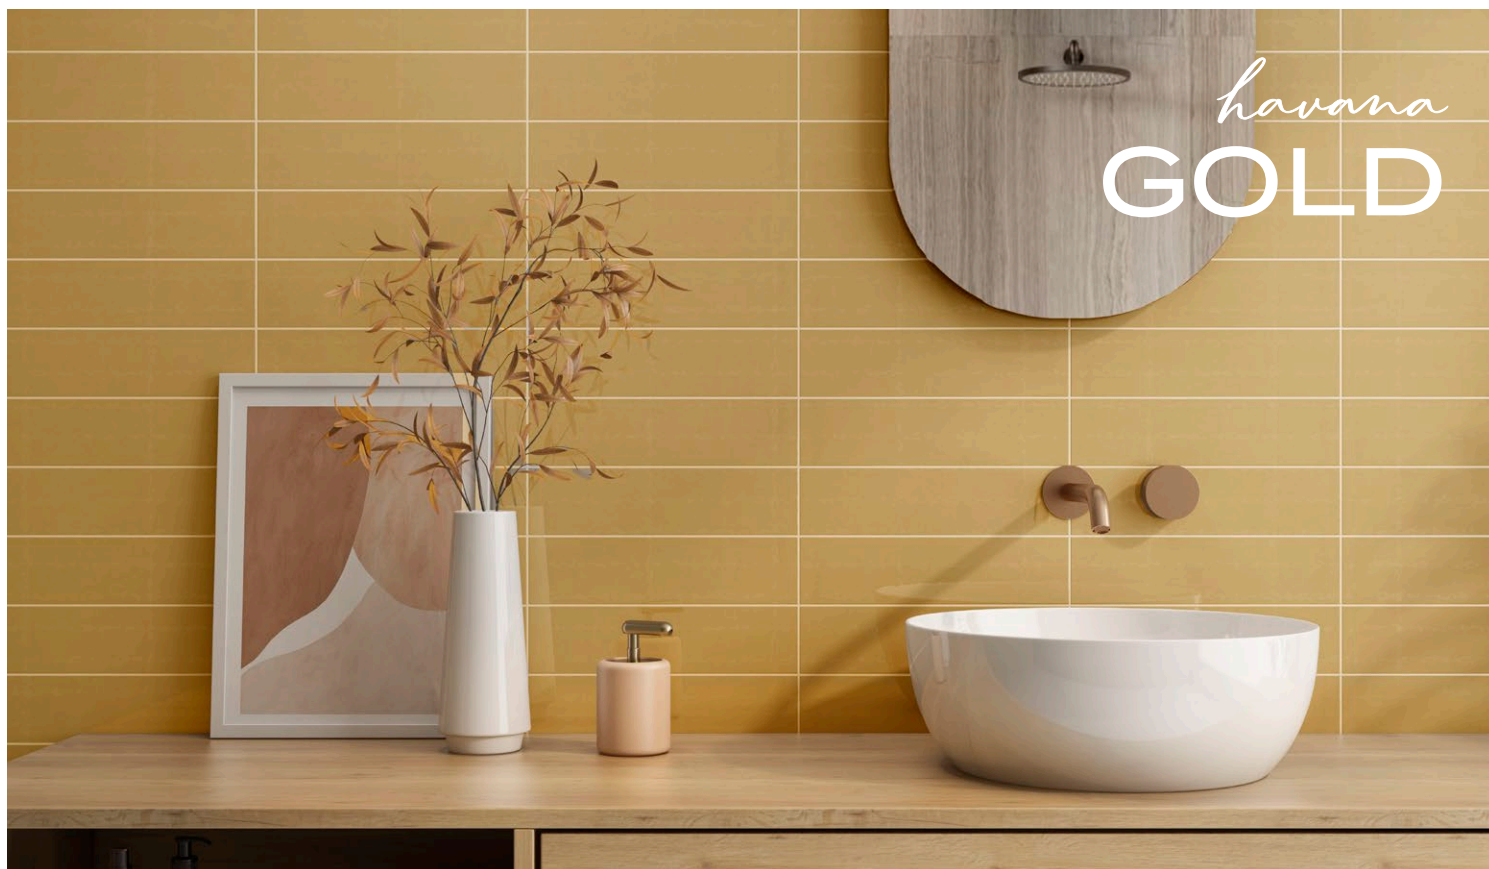

BELHAGO312



- 3x12 -

BELHAGO312STR



- 3x12 structured -

BELHAGOJOLLY



- .5x12 jolly -



havana GREEN



BELHAGN312



- 3x12 -

BELHAGN312STR





- 3x12 structured -

BELHAGNJOLLY




- .5x12 jolly -

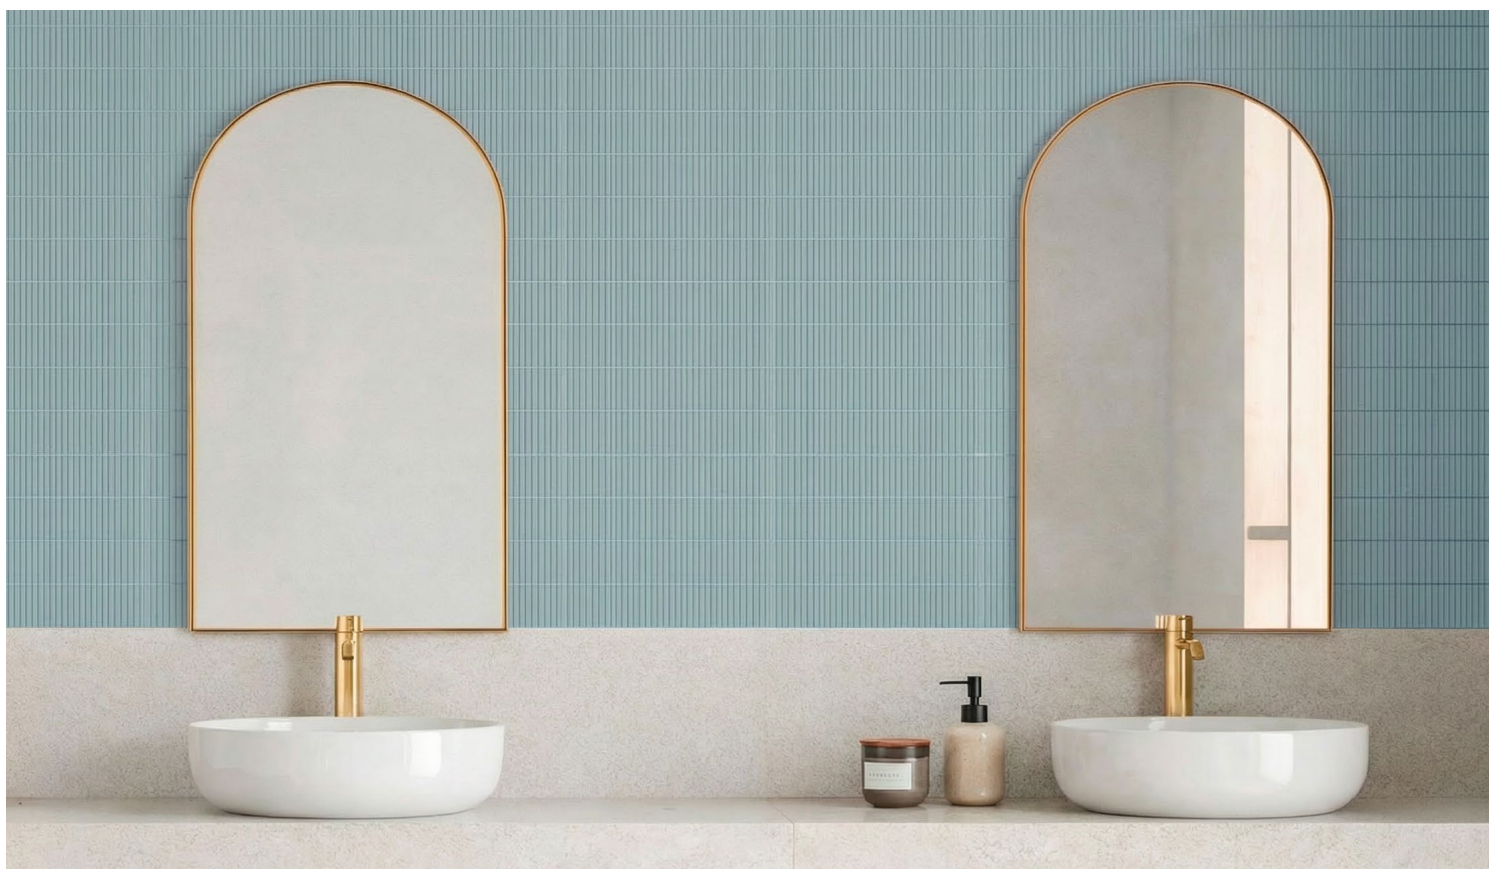

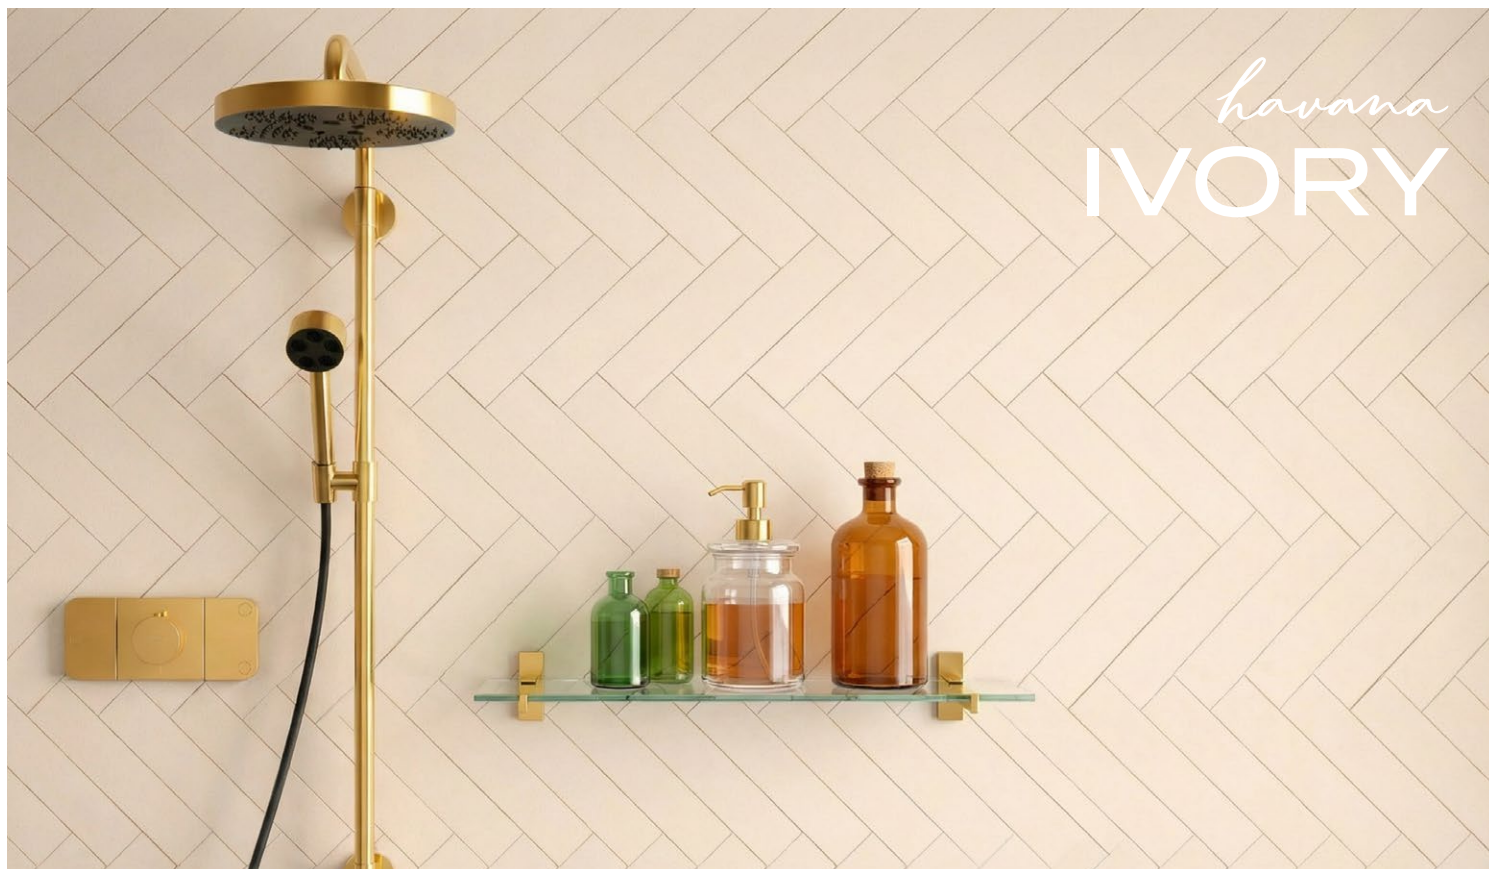

BELHAIV312



- 3x12 -

BELHAIV312STR




- 3x12 structured -

BELHAIVJOLLY



- .5x12 jolly -



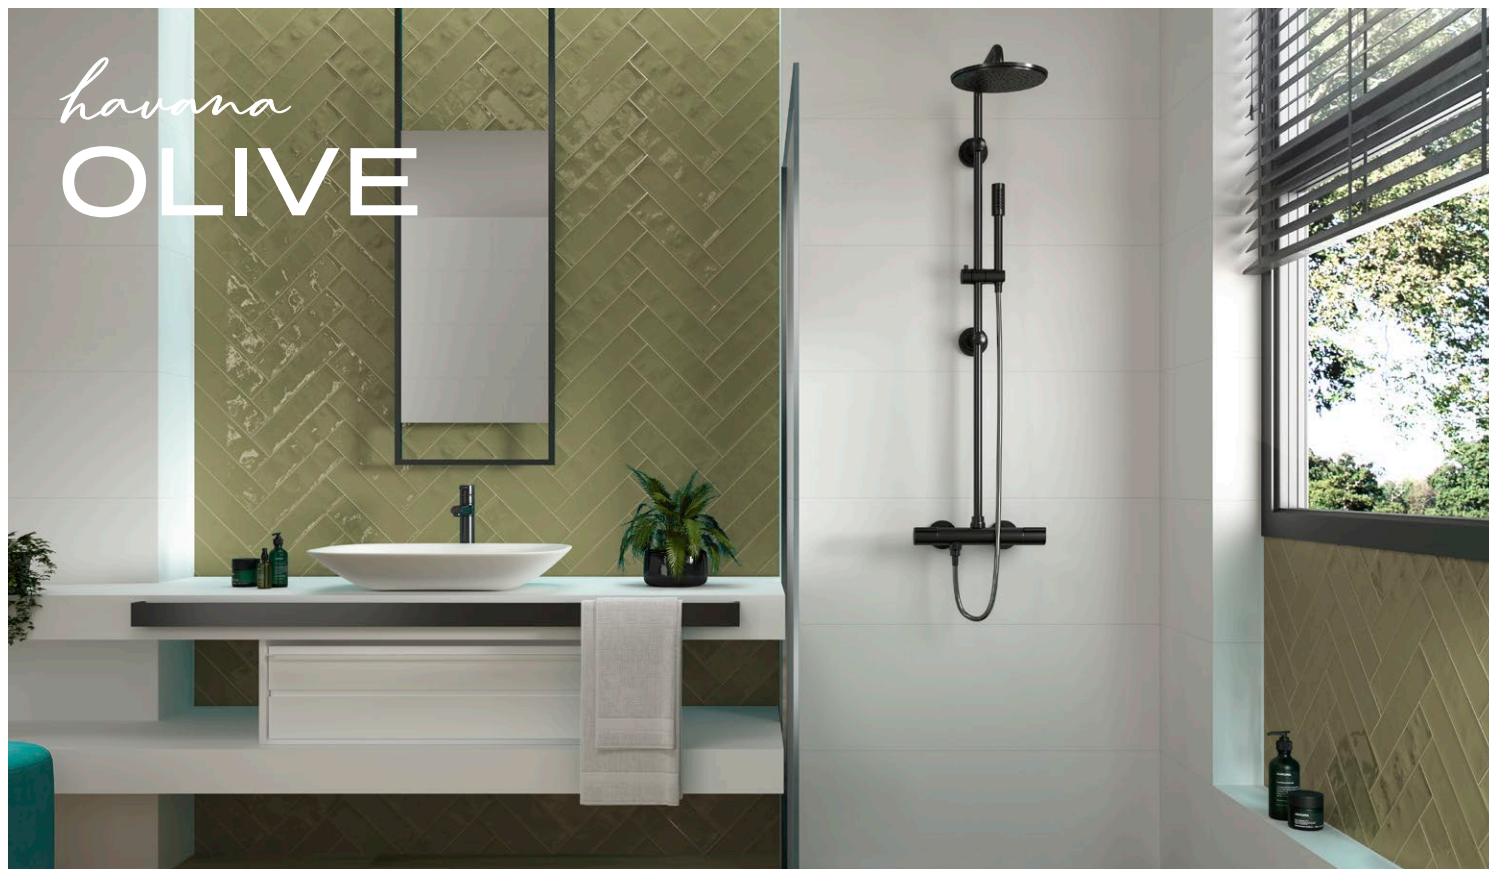

havana
OLIVE

BELHAOL312



- 3x12 -

BELHAOL312STR



- 3x12 structured -

BELHAOLJOLLY



- .5x12 jolly -





havana
ORANGE

BELHAOR312



- 3x12 -

BELHAOR312STR




- 3x12 structured -

BELHAORJOLLY




- .5x12 jolly -

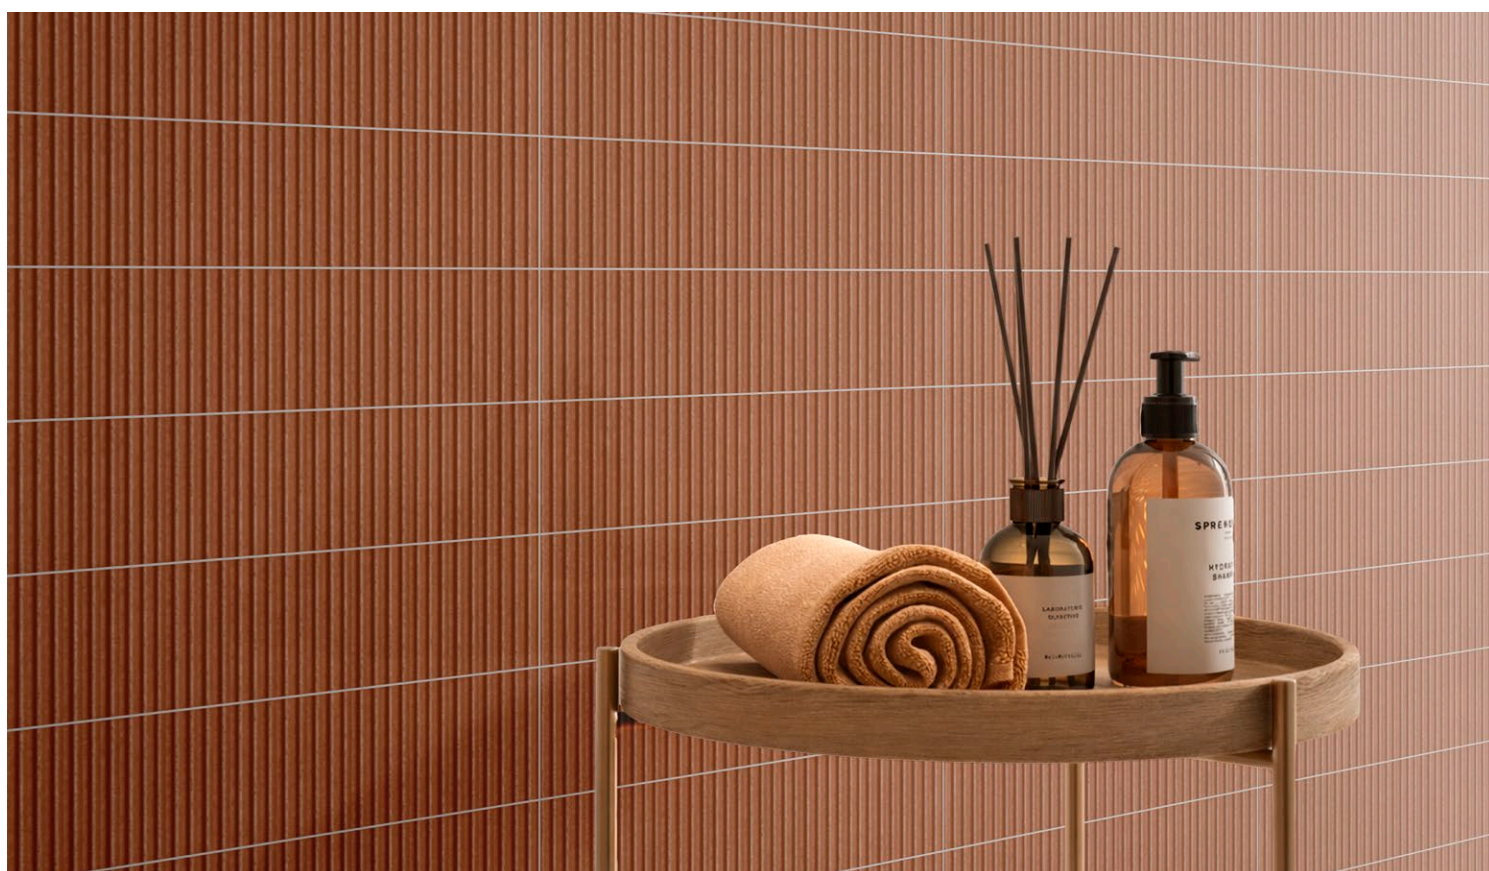

havana
TALCO



BELHATA312



- 3x12 -

BELHATA312STR



- 3x12 structured -

BELHATAJOLLY




- .5x12 jolly -





BELHAWH312



- 3x12 -

BELHAWH312STR



- 3x12 structured -

BELHAWHJOLLY



- .5x12 jolly -



HAVANA COLLECTION

TILE

Size(s)	Type	Finish
 3"x12"	Ceramic	Glossy, White-Body
 3"x12" structured		
	Thickness	Edge
 .5"x12" jolly	9mm	Straight / Pressed

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Low (V1)

NOTES

- Variations occur in all fired ceramic and natural tile products.
- Random visual variation enhances the natural beauty of this product.
- For optimal results:
 - Select tile from multiple cartons.
 - Plan shading and graphic arrangement prior to installation.
- Tile/trim supplied for a particular installation may not match samples exactly.
- Final confirmation of actual tiles and trim should be made prior to installation.
- Products are manufactured in accordance with ANSI A137.1 standards.
- Use of a latex-modified thin-set is recommended for installation.
- Special care should be taken when grouting with dark pigmented colors.

CERTIFICATES



PERFORMANCE

	ASTM#	Wall Result
Water Absorption	C373	< 16.0%
Breaking Strength	C648	120 lbs - 230 lbs
Scratch Hardness	MOHS	5.0
Chemical Resistance	C650	Resistant



Fire-Resistant



Dentproof



Stainproof



Easy-to-Clean

APPLICATIONS

	Suitable
Dry & Level - Interior Floor	
Wet & Level - Interior Floor	
Shower Floors - Residential or Light Commercial	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	
Ramps & Inclines	
Walls/Backsplashes - Interior Use Only	✓
Countertops	
Pool Linings	✓

