
# HAVANA

ceramic collection



COBSA USA

NEW YORK | NEW JERSEY | MIAMI

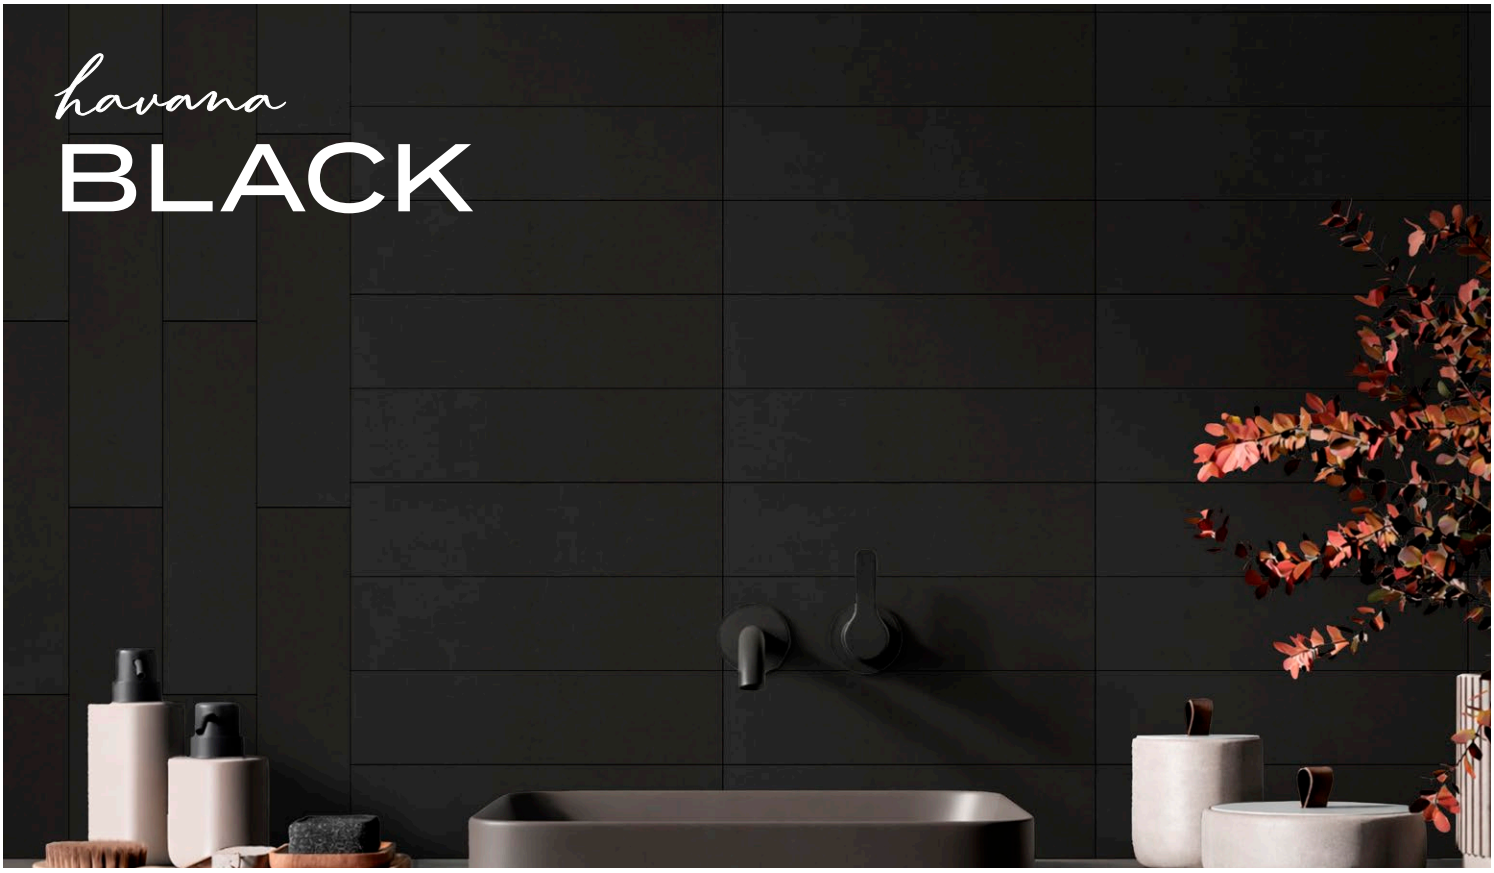


BELHABK312



- 3x12 -

BELHABK312STR




- 3x12 structured -

BELHABKJOLLY



- .5x12 jolly -



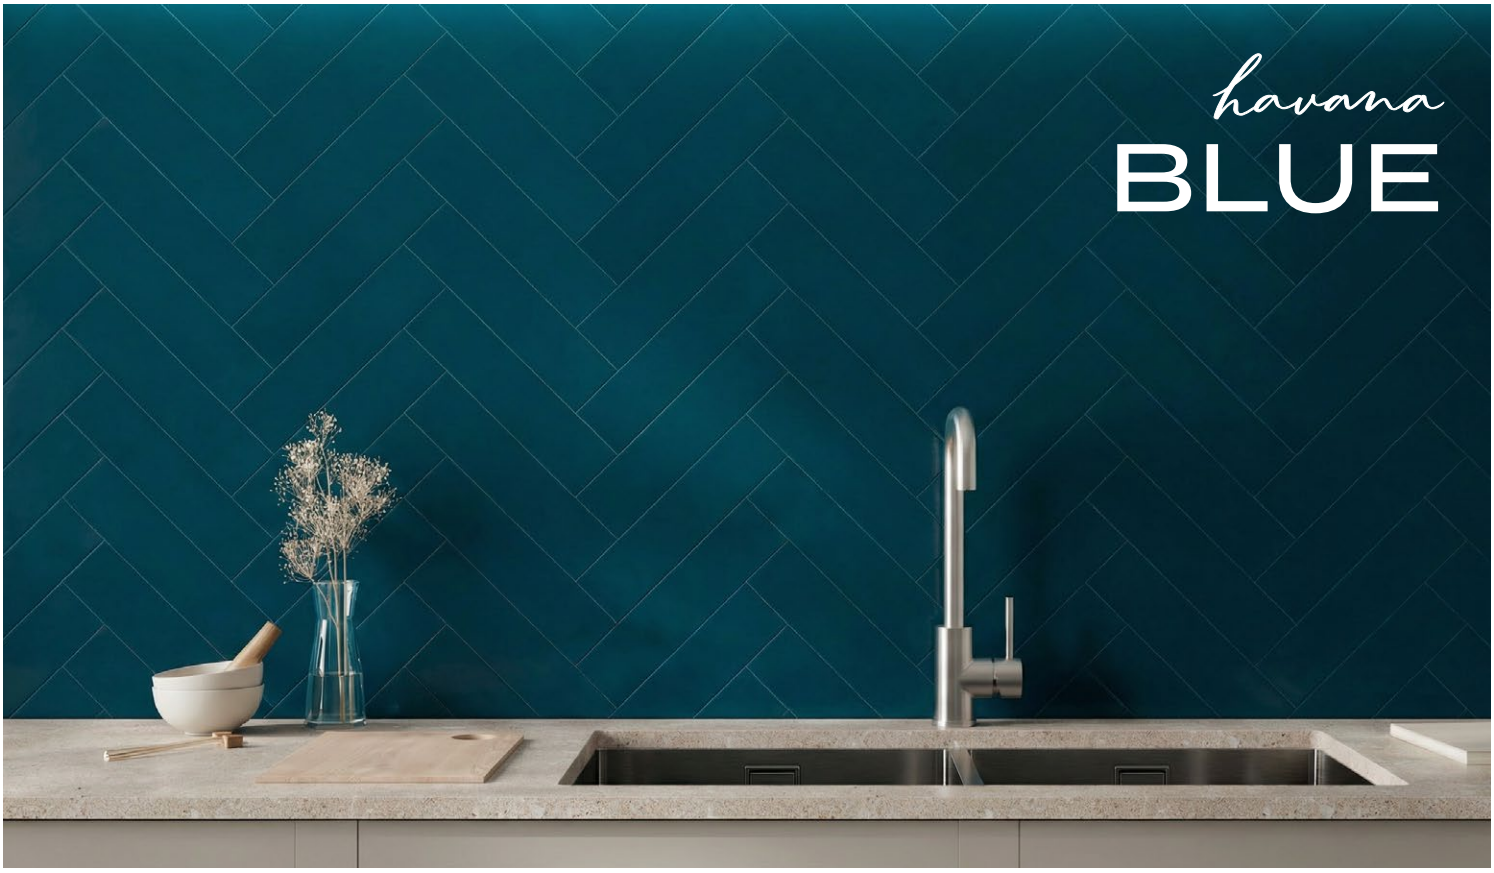


BELHABL312



- 3x12 -

BELHABL312STR




- 3x12 structured -

BELHABKJOLLY



- .5x12 jolly -



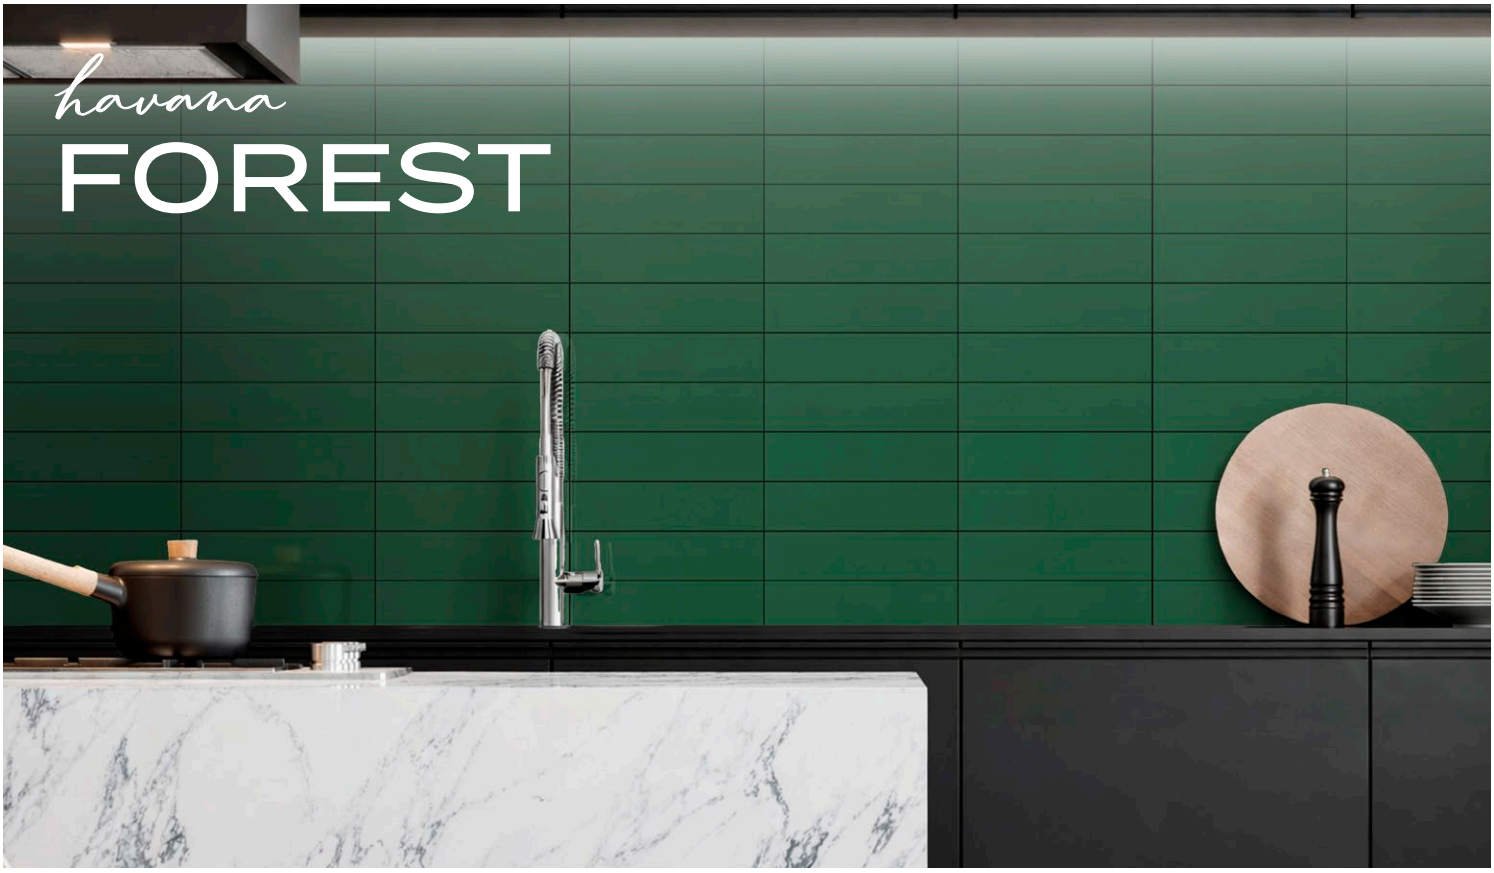


BELHAFO312



- 3x12 -

BELHAFO312STR




- 3x12 structured -

BELHAFOJOLLY



- .5x12 jolly -



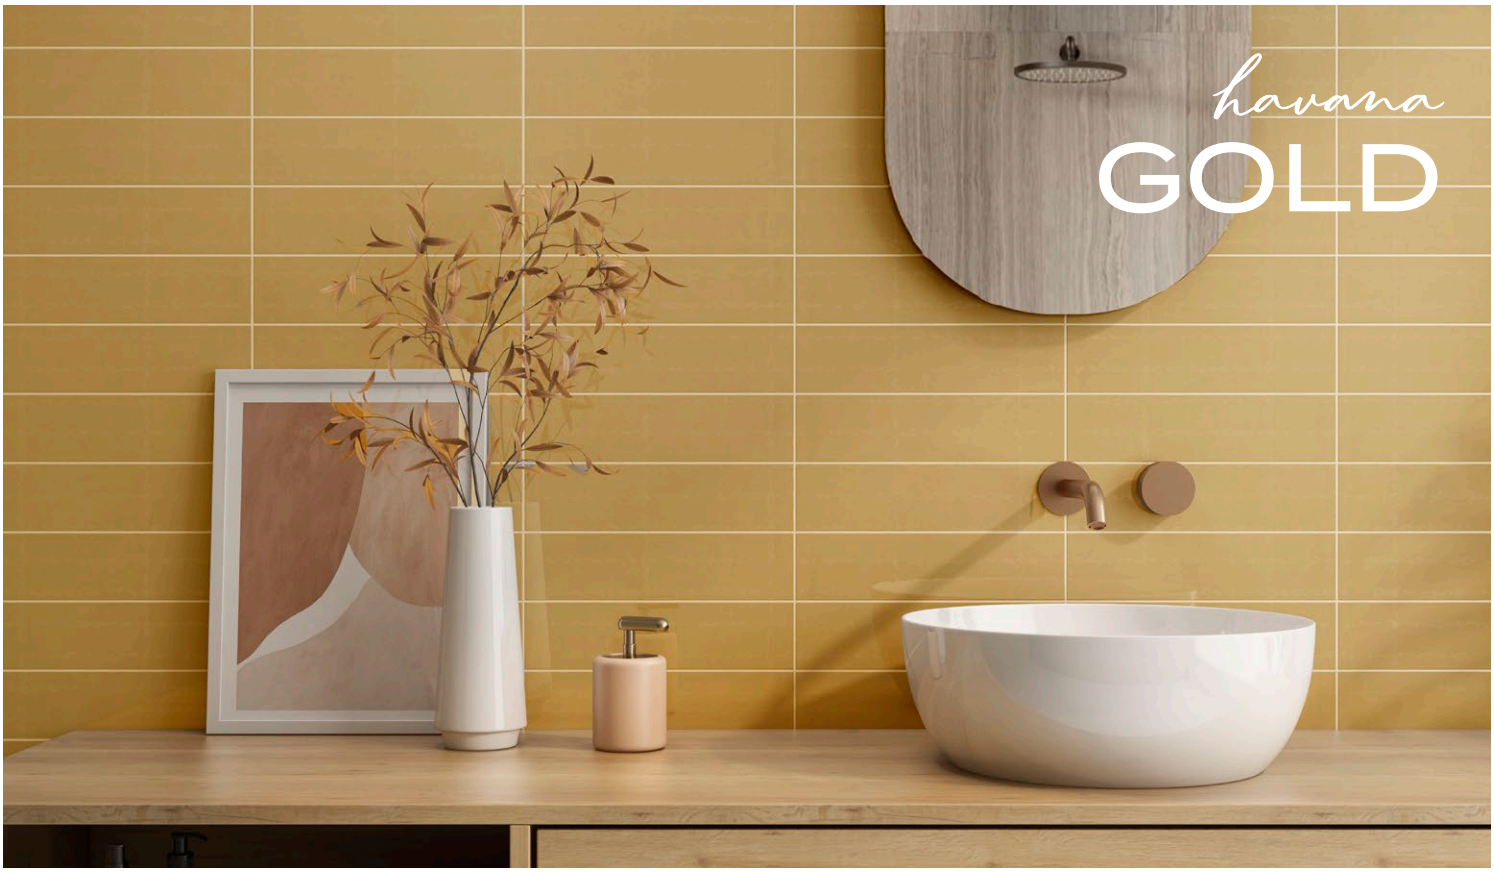


BELHAGO312

- 3x12 -

BELHAGO312STR

- 3x12 structured -

BELHAGOJOLLY

- .5x12 jolly -






BELHAGN312



- 3x12 -

BELHAGN312STR





- 3x12 structured -

BELHAGNJOLLY



- .5x12 jolly -

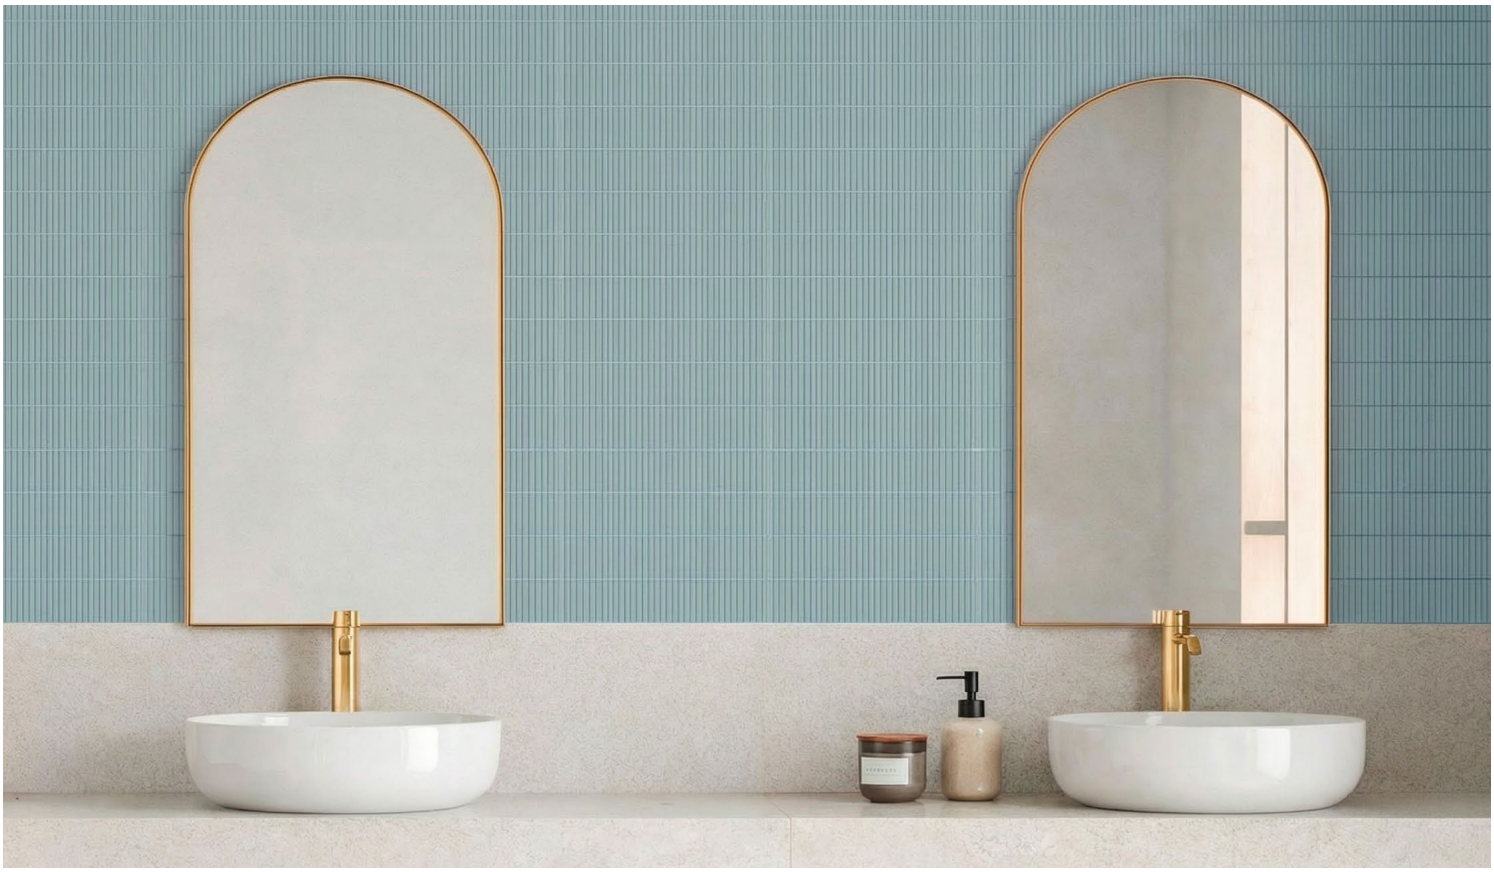

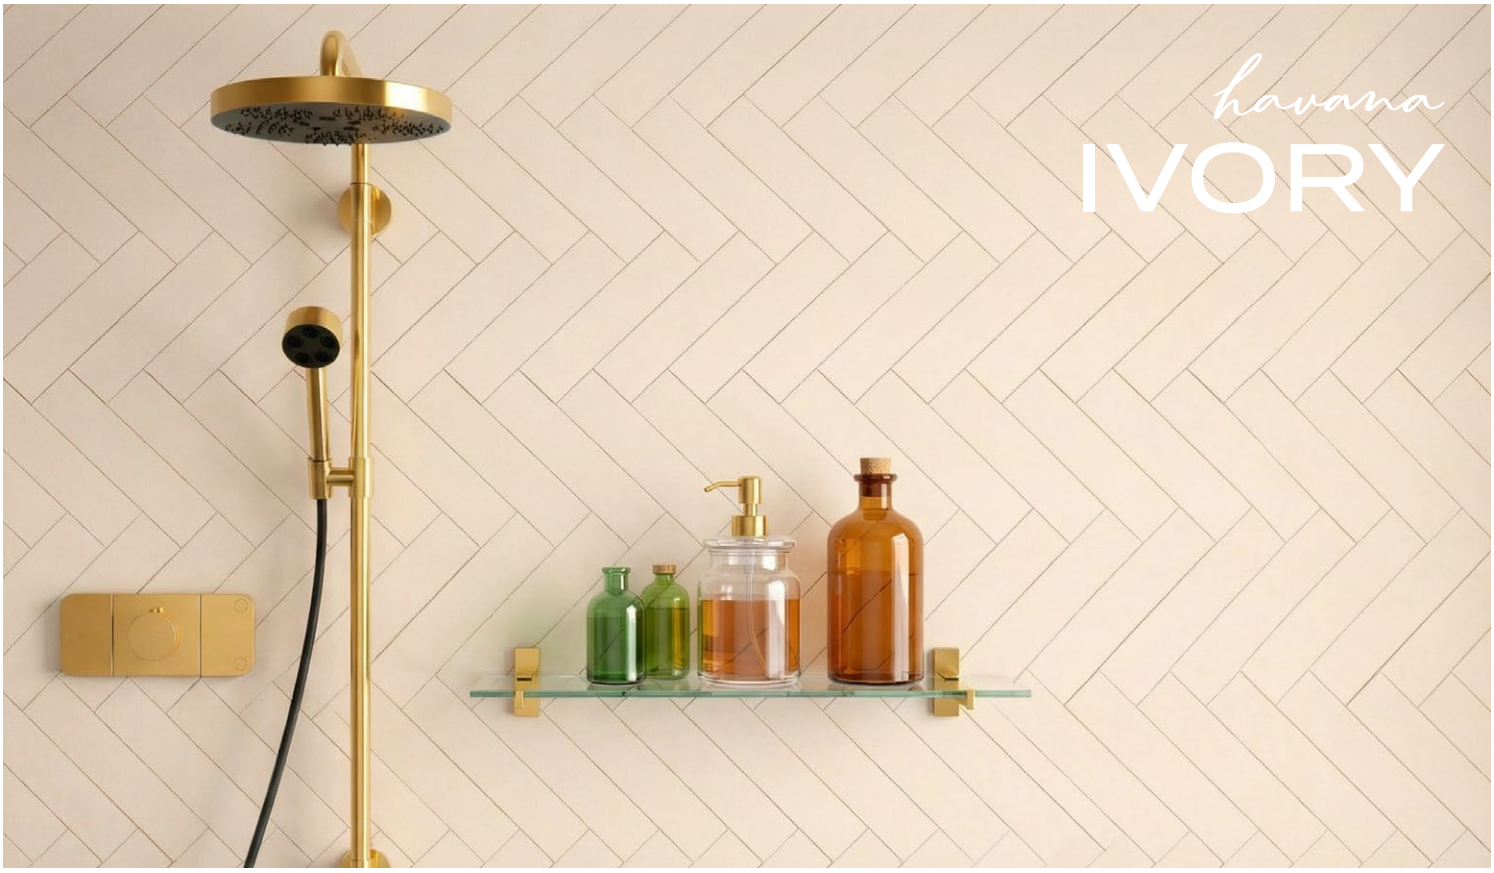


BELHAIV312

- 3x12 -


BELHAIV312STR

- 3x12 structured -

BELHAIVJOLLY

- .5x12 jolly -



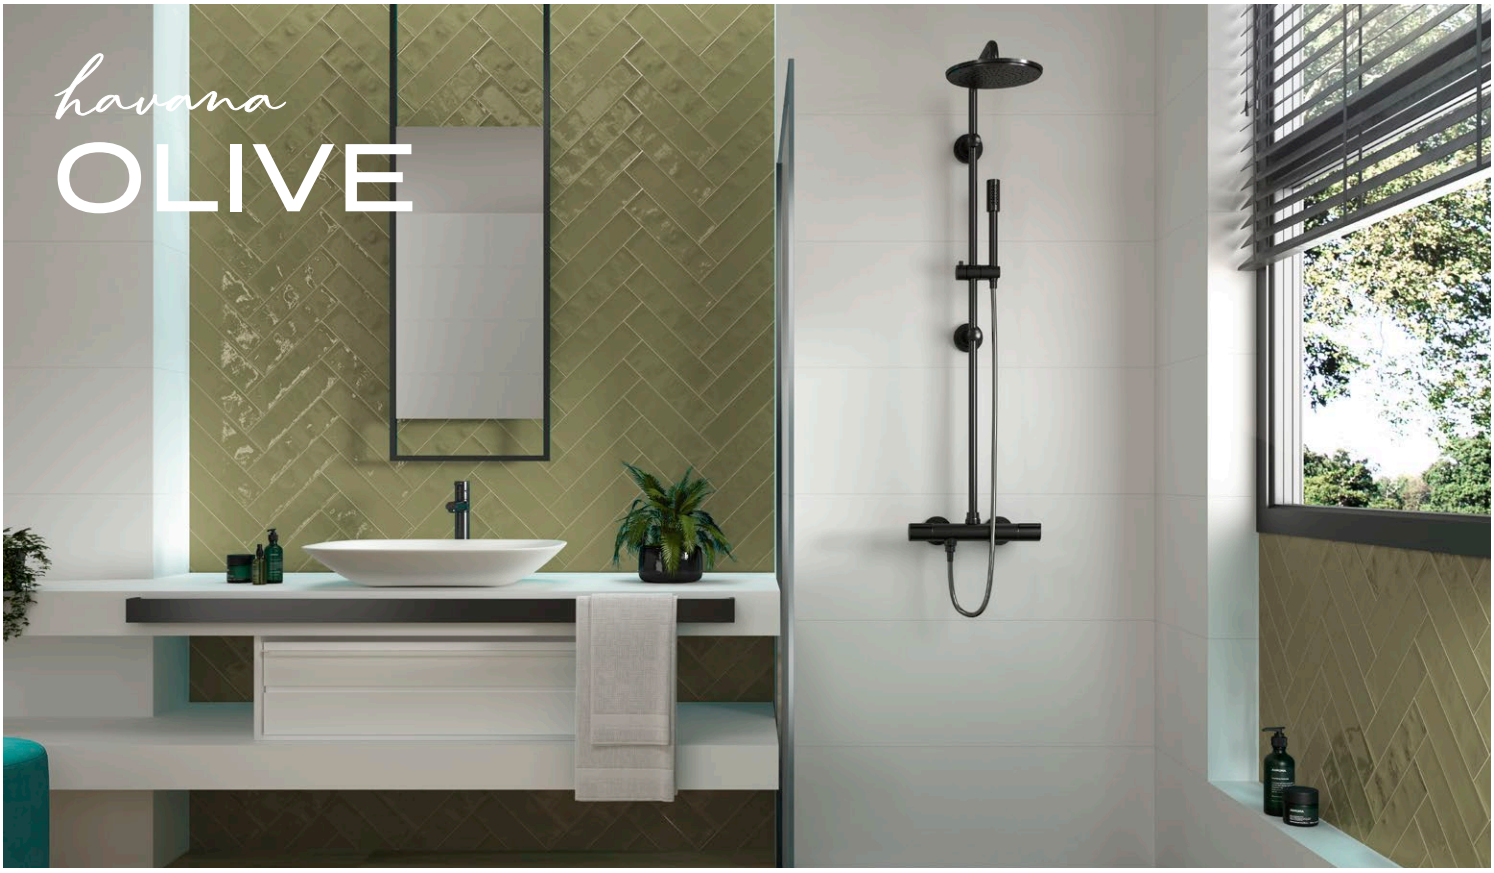


BELHAOL312



- 3x12 -

BELHAOL312STR



- 3x12 structured -

BELHAOLJOLLY



- .5x12 jolly -






BELHAOR312

- 3x12 -

BELHAOR312STR

- 3x12 structured -

BELHAORJOLLY

- .5x12 jolly -






BELHATA312



- 3x12 -

BELHATA312STR



- 3x12 structured -

BELHATAJOLLY



- .5x12 jolly -






BELHAWH312

- 3x12 -

BELHAWH312STR

- 3x12 structured -

BELHAWHJOLLY

- .5x12 jolly -



# HAVANA COLLECTION

## TILE

| Size(s) | Type | Finish |
|---|---|---|
| 3"x12" | Ceramic | Glossy, White-Body |
| 3"x12" structured | **Thickness** | **Edge** |
| .5"x12" jolly | 9mm | Straight / Pressed |

## INSTALLATION

| Grout Joint Recommendation | Shade Variation |
|---|---|
| 1/8" | Low (V1) |

### NOTES

- Variations occur in all fired ceramic and natural tile products.
- Random visual variation enhances the natural beauty of this product.
- For optimal results:
  - Select tile from multiple cartons.
  - Plan shading and graphic arrangement prior to installation.
- Tile/trim supplied for a particular installation may not match samples exactly.
- Final confirmation of actual tiles and trim should be made prior to installation.
- Products are manufactured in accordance with ANSI A137.1 standards.
- Use of a latex-modified thin-set is recommended for installation.
- Special care should be taken when grouting with dark pigmented colors.

## CERTIFICATES

## PERFORMANCE

| | ASTM# | Wall Result |
|---|---|---|
| Water Absorption | C373 | < 16.0% |
| Breaking Strength | C648 | 120 lbs - 230 lbs |
| Scratch Hardness | MOHS | 5.0 |
| Chemical Resistance | C650 | Resistant |

FIre-Resistant | Dentproof | Stainproof | Easy-to-Clean

## APPLICATIONS

| | Suitable |
|---|---|
| Dry & Level - Interior Floor | |
| Wet & Level - Interior Floor | |
| Shower Floors - Residential or Light Commercial | |
| Exterior Floor Applications ( including patios, pool decking & other wet areas with minimal footwear ) | |
| Ramps & Inclines | |
| Walls/Backsplashes - Interior Use Only | ✔ |
| Countertops | |
| Pool Linings | |

COBSA USA
NEW YORK | NEW JERSEY | MIAMI