

Albero 6

rectified porcelain stoneware



COBSA-USA

NEW YORK | NEW JERSEY | MIAMI



DOM A6FR 636



| 6 x 36 |

DOM A6FR 1060



| 10 x 60 |

ALSO AVAILABLE IN EXTERIOR PAVERS. 16x48 / 24x24

RECTIFIED PORCELAIN STONEWARE

Natural



DOM A6NA 636



| 6 x 36 |

DOM A6NA 1060



| 10 x 60 |

ALSO AVAILABLE IN EXTERIOR PAVERS. 16x48 / 24x24



DOM A6SH 636



| 6 x 36 |

DOM A6SH 1060



| 10 x 60 |

ALSO AVAILABLE IN EXTERIOR PAVERS. 16x48 / 24x24



DOM A6SU 636



| 6 x 36 |

DOM A6SU 1060



| 10 x 60 |


ALSO AVAILABLE IN EXTERIOR PAVERS. 16x48 / 24x24

Fresh
PARQUET

DOM A6FR 24



| 24 x 24 |

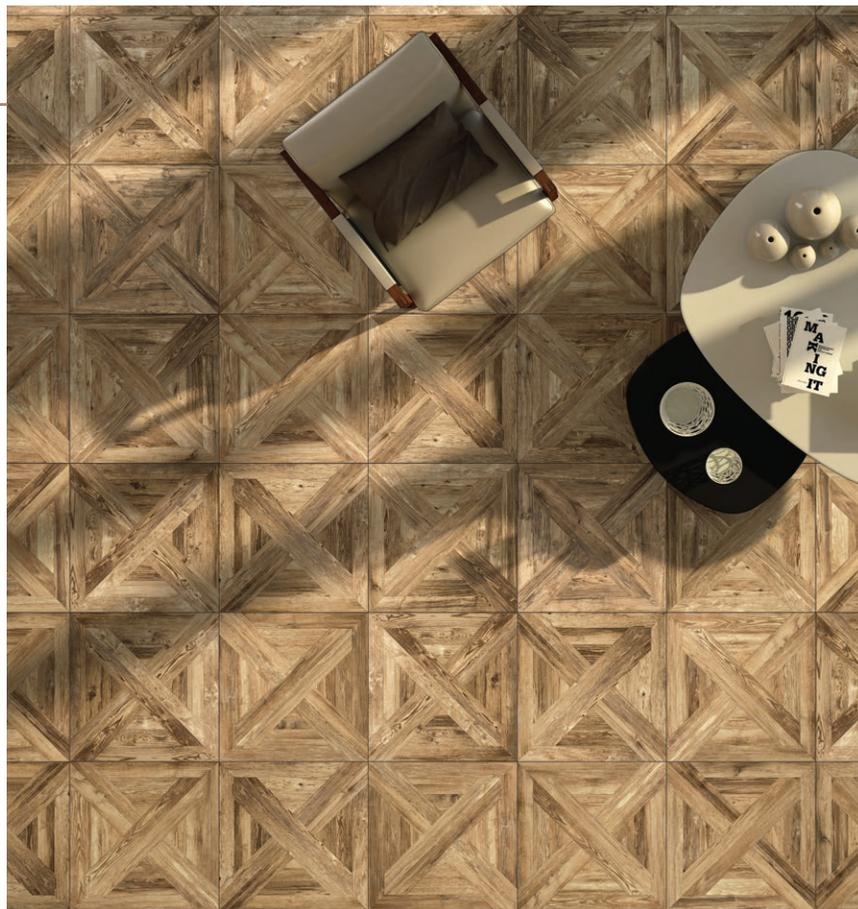


Natural
PARQUET

DOM A6NA 24



| 24 x 24 |

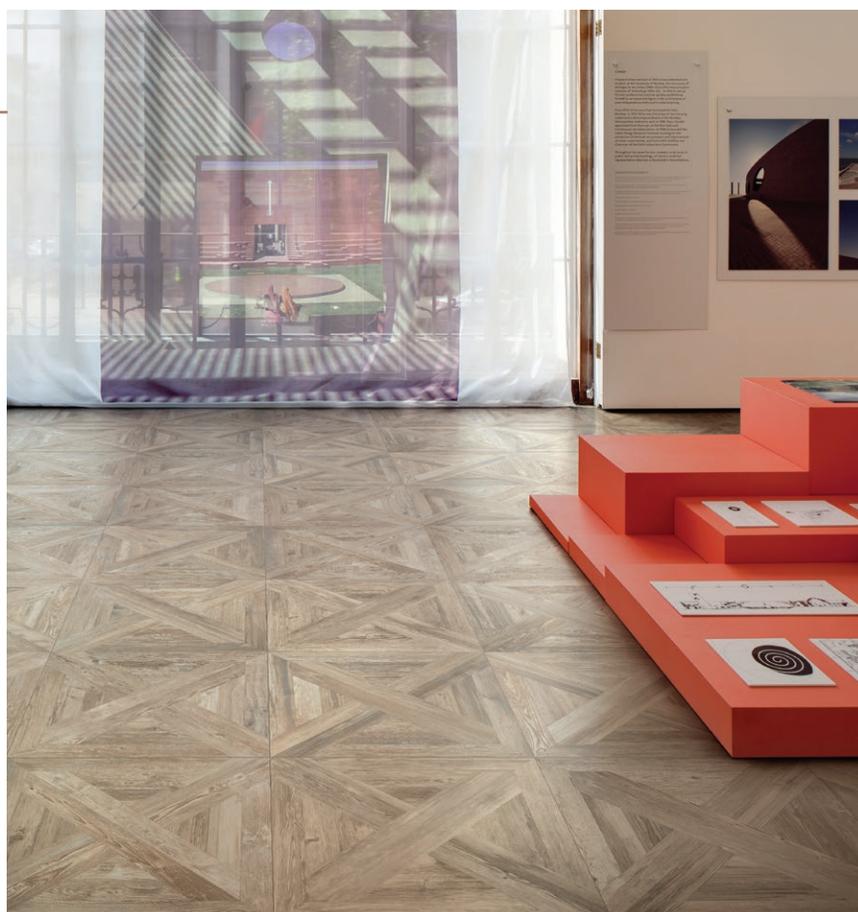




Sun
PARQUET

DOM A6SU 24




| 24 x 24 |

Suggested Applications




Installation Suggestions

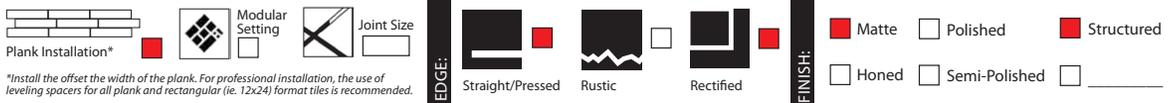

Porcelain Type



Shade Variation



Slip Resistance

DCOF	Values	Applications
<input checked="" type="checkbox"/> .56	0.42	Recommended Standard DCOF value for wet/dry commercial flooring
<input type="checkbox"/> .56	0.65	Recommended Standard DCOF value for ADA ramps

DIN 51130 *R9: Industry Standard/ADA Requirements **R11: Recommended For Exteriors

R9* (3-10°) R10 (10-19°) R11** (19-27°)
 R12 (27-35°) R13 (>35°)

DIN 51097		
Class	Typical Applications	Critical Angle
<input checked="" type="checkbox"/> A	Barefoot, but mainly dry aisles and walkways, dry changing areas	≥12°
<input checked="" type="checkbox"/> B	Shower rooms, pool surrounds, wet changing areas, disinfectant spray areas (plus all Class A areas)	≥18°
<input checked="" type="checkbox"/> C	Areas constantly under water, e.g. steps into pools, foot baths, included pool surrounds, jacuzzis (plus all Class A&B areas)	≥24°

ASTM C-1028
ANSI A137.1
DIN 51097/51130

Scratch Resistance

MOH'S SCALE
UNI EN ISO
10545.6

N/A

MINERAL	
1. Talc (Talc)	6. Microline (Glass, Glazed Tile)
2. Gypsum (Fingernail)	7. Quartz (Unglazed Porcelain)
3. Calcite (Penny)	8. Topaz (Granite)
4. Fluorite (Some Marbles)	9. Corundum (Ruby)
5. Apatite (Knife Blade)	10. Diamond (Diamond)

Industry standard ≤175mm²

Wear Resistance

PEI RATING
UNI EN ISO
10545.7

- Class 1: Walls only
 - Class 2: Residential floors w/minimal abrasive traffic
 - Class 3: Residential interiors/light commercial traffic
 - Class 4: Medium commercial applications
 - Class 5: All commercial applications/heavy traffic
- *Wear can vary greatly. please consult with a professional.*

Stain Resistance

ASTM C1378-04
UNI EN ISO
10545.14

5

- 5: Removed after 5 minutes (hot water running)
- 4: Removed by manual cleaning (weak detergent)
- 3: Removed by mechanical cleaning (strong detergent)
- 2: Removed by immersion (24 hrs in suitable solvent)
- 1: Stain not removed

Water Absorption

ASTM C-373
UNI EN ISO
10545.3

<input checked="" type="checkbox"/>	Absorbs 0-.5%	<input type="checkbox"/>	Absorbs .5-3%	<input type="checkbox"/>	Absorbs 3-7%	<input type="checkbox"/>	Absorbs 7% +
<input checked="" type="checkbox"/>	Impervious	<input type="checkbox"/>	Vitreous	<input type="checkbox"/>	Semi-Vitreous	<input type="checkbox"/>	Non-Vitreous
<input checked="" type="checkbox"/>	Interior/Exterior Frost Resistant	<input type="checkbox"/>	Interior/Exterior Frost Resistant	<input type="checkbox"/>	Indoor Use Only	<input type="checkbox"/>	Indoor Use Only

Breaking Strength

ASTM C648
UNI EN ISO
10545.4

PASS

Industry standard should be greater than 250 lbs or 50 N/MM²

Facial Dimension

ASTM c499-09
UNI EN ISO
10545.02

	Standard	Tolerance	Result
flatness	±5mm	±.5%	PASS
thickness	±6mm	±.5%	PASS
straightness	±4.5mm	±.5%	PASS
squareness	±5.4mm	±.6%	PASS
sides L/W	±1.1mm ±4.5mm	±.5%	PASS

Chemical Resistance

ASTM C650
UNI EN ISO
10545.13



Allowances for:

	result
Acid	PASS
Bases	PASS
Chemicals	PASS

Leed Information



REQUIREMENTS FOR COMMERCIAL INTERIORS/NEW CONSTRUCTION

Sustainable Sites	1 Point
Site selection	
SS CREDIT 1 Heat Island Effect-non roof	<input type="checkbox"/>
Material with a solar reflectant index of at least 29.	
Energy & Atmosphere	1 Point
EA CREDIT 4 Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FT	<input type="checkbox"/>
Indoor Environmental Quality	1 Point
Low-Emitting Materials-Flooring Systems	
IEQ CREDIT 3.1-7 Green Cleaning: Reducing occupants exposure to hazardous cleaning chemicals.	<input type="checkbox"/>
IEQ CREDIT 4.1 Low Emitting Adhesives: Products less than 65 G/L VOC	<input type="checkbox"/>
IEQ CREDIT 4.3 Low Emitting Materials: Flooring systems.	<input type="checkbox"/>

Materials & Resources	1 Point	2 Points
M&R CREDIT 2 Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	50% <input type="checkbox"/>	70% <input type="checkbox"/>
M&R CREDIT 4.1-4.2 Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
M&R CREDIT 5 Regional Materials: Materials manufactured within 500 miles of the project site.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
Innovation in Design	1-5 Points	
ID CREDIT 1 Innovation in Design Measurable exemplary environmental performance.	<input type="checkbox"/>	

Type: **Porcelain Stoneware**
Product Line: **Albero 6**

The marketing name for this product is property of Cobas-USA. This same product may be marketed under different names.